

01-24-00

A

WORKMAN NYDEGGER & SEELEY

01/21/00



10760 U.S.
PTO
ATTORNEYS AT LAW
A PROFESSIONAL CORPORATION
1000 EAGLE GATE TOWER
60 EAST SOUTH TEMPLE
SALT LAKE CITY, UTAH 84111
TELEPHONE (801) 533-9800
FACSIMILE (801) 328-1707

RICK D. NYDEGGER
DAVID O. SEELEY
BRENT P. LORIMER
THOMAS R. VUKSINICK
LARRY R. LAYCOCK
JONATHAN W. RICHARDS
DAVID R. WRIGHT
JOHN C. STRINGHAM
BRADLEY K. DESANDRO
JOHN M. GUYNN
CHARLES L. ROBERTS
GREGORY M. TAYLOR
DANA L. TANGREN
KEVIN B. LAURENCE
ERIC L. MASCHOFF
CHARLES J. VEVERKA
ROBYN L. PHILLIPS
RICHARD C. GILMORE†

DAVID B. DELLENBACH
JOHN N. GREAVES
KEVIN K. JOHANSON
L. DAVID GRIFFIN
R. BURNS ISRAELSEN
DAVID R. TODD
FRASER D. ROY
CARL T. REED
JESÚS JUANÓS I TIMONEDA, Ph.D.
STEPHEN D. PRODNUK*, Ph.D.
R. PARRISH FREEMAN, Jr.
ADRIAN J. LEE†

†ADMITTED ONLY IN CALIFORNIA
*ADMITTED ONLY IN VIRGINIA

H. ROSS WORKMAN
OF COUNSEL

PATENT
TRADEMARK
COPYRIGHT
TRADE SECRETS
COMPETITION
LICENSING
LITIGATION

10760 U.S. PTO
01/21/00

MAILING ADDRESS:
P.O. BOX 45862
SALT LAKE CITY, UT 84145

INTERNET
HOME PAGE: <http://www.wnspat.com>
GENERAL E-MAIL: info@wnspat.com

Express Mail Label No.EL394374930US

PATENT APPLICATION
Docket: 13676.152

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box: PATENT APPLICATION
Assistant Commissioner for Patents
Washington, DC 20231

TRANSMITTAL FOR PATENT APPLICATION

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is a United States patent application entitled OPTICALLY VARIABLE SECURITY DEVICES in the names of the following inventors:

Inventor: Roger W. Phillips
Address: 466 Jacqueline Drive
Santa Rosa, CA 95405
Citizenship: U.S.A.

Inventor: Richard L. Bonkowski
Address: 3568 Southridge Drive
Santa Rosa, CA 95403
Citizenship: U.S.A.

Inventor: Patrick K. Higgins
Address: 9971 Troon Ct.
Windsor, CA 95492
Citizenship: U.S.A.

01/21/00

Inventor: Charles T. Markantes
Address: 155 Stony Point Road #21
Santa Rosa, CA 95401
Citizenship: U.S.A.


Enclosed are the following:

- ☒ A specification, claims, abstract, and cover page in total comprising fifty-four (54) pages.
- ☒ Thirteen (13) sheets of drawings.
- ☒ A Certificate of Express Mailing by "Express Mail" certifying a filing date by use of Express Mail Label No. EL394374930US.
- ☒ No fees are enclosed.
- ☒ No Declaration, Power of Attorney, and Petition is enclosed.
- ☐ Priority to _____ (country) Application Serial No. _____ filed on _____ is claimed under 35 U.S.C. § 119.

Please address all future correspondence in connection with the above-identified patent application to the attention of the undersigned.

Dated this 21st day of January 2000.

Respectfully submitted,

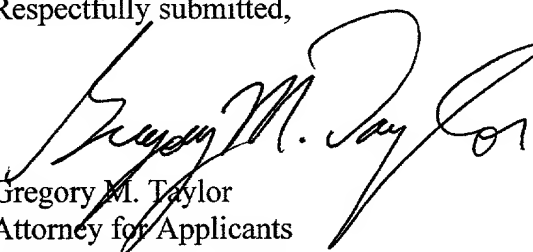
Gregory M. Taylor
Attorney for Applicants
Registration No. 34,263

WORKMAN, NYDEGGER & SEELEY
1000 Eagle Gate Tower
60 East South Temple
Salt Lake City, Utah 84111
Telephone: (801) 533-9800
Facsimile: (801) 328-1707

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

"Express Mail" Mailing Label No.: EL394374930US

Date of Deposit: January 21st, 2000


CERTIFICATE OF MAILING BY "EXPRESS MAIL"

I hereby certify that the following documents are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated below in an envelope addressed to Box: PATENT APPLICATION, Assistant Commissioner for Patents, Washington, DC 20231:

- Patent Application in the names of Roger W. Phillips et al. for OPTICALLY VARIABLE SECURITY DEVICES (54 pages)
- Drawings (13 sheets)
- Transmittal Letter (2 pgs.)
- Postcard

Dated this 21st day of January 2000.

Respectfully submitted,

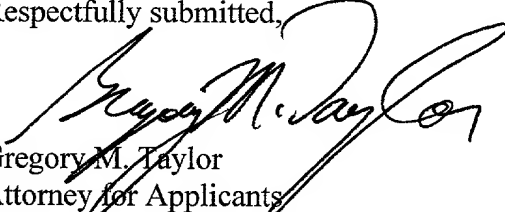

Gregory M. Taylor
Attorney for Applicants
Registration No. 34,263

WORKMAN, NYDEGGER & SEELEY
1000 Eagle Gate Tower
60 East South Temple
Salt Lake City, Utah 84111
Telephone: (801) 533-9800

GMT:vfw

G:\DATA\WPDOCS\VF\GMT\13676152trx.doc

PATENT APPLICATION
Docket No. 13676.152

of

and

for

OPTICALLY VARIABLE SECURITY DEVICES

WORKMAN, NYDEGGER & SEELEY

**A PROFESSIONAL CORPORATION
ATTORNEYS AT LAW
1000 EAGLE GATE TOWER
60 EAST SOUTH TEMPLE
SALT LAKE CITY, UTAH 84111**

BACKGROUND OF THE INVENTION

1. The Field of the Invention

The present invention is related generally to thin film optical coatings for use in producing security articles. More specifically, the present invention is related to the production of diffractive surfaces such as holograms or gratings having color shifting or optically variable backgrounds which can be used as security articles in a variety of applications.

2. The Relevant Technology

Color shifting pigments and colorants have been used in numerous applications, ranging from automobile paints to anti-counterfeiting inks for security documents and currency. Such pigments and colorants exhibit the property of changing color upon variation of the angle of incident light, or as the viewing angle of the observer is shifted. The primary method used to achieve such color shifting colorants is to disperse small flakes, which are typically composed of multiple layers of thin films having particular optical characteristics, throughout a medium such as paint or ink that may then be subsequently applied to the surface of an object.

Diffraction patterns and embossments, and the related field of holographs, have begun to find wide-ranging practical applications due to their aesthetic and utilitarian visual effects. One very desirable decorative effect is the iridescent visual effect created by a diffraction grating. This striking visual effect occurs when ambient light is diffracted into its color components by reflection from the diffraction grating. In general, diffraction gratings are essentially repetitive structures made of lines or grooves in a material to form a peak and trough structure. Desired optical effects within the visible spectrum occur when diffraction gratings have regularly spaced grooves in the range of hundreds to thousands of lines per millimeter on a reflective surface.

1 Diffraction grating technology has been employed in the formation of two-
2 dimensional holographic patterns which create the illusion of a three-dimensional image to
3 an observer. Three-dimensional holograms have also been developed based on differences
4 in refractive indices in a polymer using crossed laser beams, including one reference beam
5 and one object beam. Such holograms are called volume holograms or 3D holograms.
6 Furthermore, the use of holographic images on various objects to discourage counterfeiting
7 has found widespread application.

8 There currently exist several applications for surfaces embossed with holographic
9 patterns which range from decorative packaging such as gift wrap, to security documents
10 such as bank notes and credit cards. Two-dimensional holograms typically utilize diffraction
11 patterns which have been formed on a plastic surface. In some cases, a holographic image
12 which has been embossed on such a surface can be visible without further processing;
13 however, it is generally necessary, in order to achieve maximum optical effects, to place a
14 reflective layer, typically a thin metal layer such as aluminum, onto the embossed surface.
15 The reflective layer substantially increases the visibility of the diffraction pattern
16 embossment.

17 Every type of first order diffraction structure, including conventional holograms and
18 grating images, has a major shortcoming even if encapsulated in a rigid plastic. When
19 diffuse light sources, such as ordinary room lights or an overcast sky, are used to illuminate
20 the holographic image, all diffraction orders expand and overlap so that the diffraction colors
21 are lost and not much of the visual information contained in the hologram is revealed. What
22 is typically seen is only a silver colored reflection from the embossed surface and all such
23 devices look silvery or pastel, at best, under such viewing conditions. Thus, holographic
24 images generally require direct specular illumination in order to be visualized. This means
25 that for best viewing results, the illuminating light must be incident at the same angle as the
26 viewing angle.

1 Since the use of security holograms has found widespread application, there exists
2 a substantial incentive for counterfeiters to reproduce holograms which are frequently used
3 in credit cards, banknotes, and the like. Thus, a hurdle that security holograms must
4 overcome to be truly secure, is the ease at which such holograms can be counterfeited. One
5 step and two step optical copying, direct mechanical copying and even re-origination have
6 been extensively discussed over the Internet. Various ways to counteract these methods have
7 been explored but none of the countermeasures, taken alone, has been found to be an
8 effective deterrent.

9 One of the methods used to reproduce holograms is to scan a laser beam across the
10 embossed surface and optically record the reflected beam on a layer of a material such as a
11 photopolymerizable polymer. The original pattern can subsequently be reproduced as a
12 counterfeit. Another method is to remove the protective covering material from the
13 embossed metal surface by ion etching, and then when the embossed metal surface is
14 exposed, a layer of metal such as silver (or any other easily releasable layer) can be
15 deposited. This is followed by deposition of a layer of nickel, which is subsequently released
16 to form a counterfeiting embossing shim.

17 Due to the level of sophistication of counterfeiting methods, it has become necessary
18 to develop more advanced security measures. One approach, disclosed in U.S. Patent Nos.
19 5,624,076 and 5,672,410 to Miekka et al., embossed metal particles or optical stack flakes
20 are used to produce a holographic image pattern.

21 A further problem with security holograms is that it is difficult for most people to
22 identify and recollect the respective images produced by such holograms for verification
23 purposes. The ability of the average person to authenticate a security hologram conclusively
24 is compromised by the complexity of its features and by confusion with decorative diffractive
25 packaging. Thus, most people tend to confirm the presence of such a security device rather
26

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25
- 26

In other efforts to thwart counterfeiters, the hologram industry has resorted to more complex images such as producing multiple images as the security device is rotated. These enhanced images provide the observer with a high level of "flash" or aesthetic appeal. Unfortunately, this added complexity does not confer added security because this complex imagery is hard to communicate and recollection of such imagery is difficult, if not impossible, to remember.

It would therefore be of substantial advantage to develop improved security products which provide enhanced viewing qualities in various lighting conditions, especially in diffuse lighting, and which are usable in various security applications to make counterfeiting more difficult.

SUMMARY AND OBJECTS OF THE INVENTION

It is a primary object of the invention to provide a security article having color shifting properties which increases the difficulty of counterfeiting in a variety of applications.

Another object of the invention to provide a security article with a distinctive pattern that is readily observable over a wide range of viewing angles in diffuse lighting conditions.

Another object of the invention is to provide a security article with an optical interference pattern such as a holographic pattern that has enhanced visibility and contrast to provide for viewing under diffuse lighting conditions without the need for direct specular light.

To achieve the foregoing objects and in accordance with the invention as embodied and broadly described herein, a security article is provided which includes a light transmissive substrate having a first surface and an opposing second surface, with the first surface having an optical interference pattern such as a holographic image pattern or an optical diffraction pattern thereon. A color shifting optical coating is formed on the substrate such as on the interference pattern or on the opposing second surface of the substrate, with the optical coating providing an observable color shift as the angle of incident light or viewing angle changes. Various processes can be utilized to form the security article, such as vacuum coating processes, organic coatings, lamination, laser scribing, and laser imaging.

The color shifting optical coating can be varied in different embodiments of the invention. For example, the optical coating can be a multilayer optical interference film such as a three layer optical stack of absorber-dielectric-reflector, or alternating layers of low and high index of refraction dielectric layers. In addition, the optical coating can be formed from a plurality of multilayer optical interference flakes dispersed in a polymeric medium such as a color shifting ink.

1 In other embodiments, various security articles are formed by laminating a
2 prelamine structure including a color shifting optical coating, which can optionally be laser
3 imaged by ablation, to a substrate embossed with an optical interference pattern.

4 In another method of the invention, a color shifting optical coating is formed on a
5 master shim so as to conform to the shape of an optical interference pattern on the shim. A
6 carrier substrate layer is affixed to the optical coating and is removed along with the optical
7 coating from the shim to produce a security article with the interference pattern replicated
8 in the optical coating.

9 The security article of the invention can be affixed to a variety of objects through
10 various attachment mechanisms, such as pressure sensitive adhesives or hot stamping
11 processes, to provide for enhanced security measures such as anticounterfeiting. The security
12 article can be utilized in the form of a label, a tag, a ribbon, a security thread, and the like,
13 for application to a variety of objects such as security documents, monetary currency, credit
14 cards, merchandise, etc.

15 These and other aspects and features of the present invention will become more fully
16 apparent from the following description and appended claims, or may be learned by the
17 practice of the invention as set forth hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to more fully understand the manner in which the above-recited and other advantages and objects of the invention are obtained, a more particular description of the invention will be rendered by reference to specific embodiments thereof which are illustrated in the appended drawings. Understanding that these drawings depict only typical embodiments of the invention and are not therefore to be considered as limiting of its scope, the invention will be described and explained with additional specificity and detail through the use of accompanying drawings in which:

Figure 1 is a schematic depiction of a security article according to one embodiment of the present invention;

Figure 2 is a schematic depiction of a security article according to another embodiment of the present invention;

Figure 3 is a schematic depiction of a security article according to a further embodiment of the present invention;

Figure 4 is a schematic depiction of a security article according to another embodiment of the present invention;

Figure 5 is a schematic depiction of a security article according to yet another embodiment of the present invention;

Figure 6 is a schematic depiction of a security article according to a further embodiment of the present invention;

Figure 7 is a schematic depiction of a security according to another embodiment of the present invention;

Figure 8A is a schematic depiction of a security article according to a further embodiment of the present invention;

Figure 8B is an enlarged sectional view of the security article of Figure 8A;

1 Figure 9 is a schematic depiction of a security article according to another
2 embodiment of the present invention;

3 Figure 10A is a schematic depiction of a prelamine structure used to form a security
4 article according to an additional embodiment of the present invention;

5 Figure 10B is a schematic depiction of a security article formed from the prelamine
6 structure of Figure 10A;

7 Figure 11 is a schematic depiction of a security article according to another
8 embodiment of the present invention;

9 Figure 12 is a schematic depiction of a security article according to an alternative
10 embodiment of the present invention;

11 Figure 13 is a schematic depiction of a security article according to an additional
12 embodiment of the present invention;

13 Figure 14 is a schematic depiction of a security article according to another
14 embodiment of the present invention;

15 Figure 15 is a schematic depiction of a hot stamping process used to form one
16 embodiment of a security article according to the invention;

17 Figure 16 is a schematic depiction of a hot stamping process used to form another
18 embodiment of a security article according to the invention;

19 Figures 17A and 17B are diagrams showing the geometries of various viewing
20 conditions used in measuring the optical characteristics of a security article of the invention;

21 Figure 18 is a graph showing the spectral profiles for a security article of the
22 invention;

23 Figure 19 is a graphical representation of the CIE Lab color space showing trajectory
24 of color for a security article of the invention;

25 Figure 20 is a graph showing the off-gloss spectral profiles for a security article of
26 the invention;

1 Figure 21 is a graph showing the on-gloss spectral profiles for a security article of the
2 invention;

3 Figure 22 is a graph showing the on-gloss spectral profiles for a security article of the
4 invention;

5 Figure 23 is a photomicrograph of a thin film optical stack used in a security article
6 of the invention; and

7 Figures 24A and 24B are photomicrographs showing holographic relief at the top of
8 a thin film optical stack used in a security article of the invention.

DETAILED DESCRIPTION OF THE INVENTION

The present invention is directed to security articles having diffractive surfaces with color shifting backgrounds that produce enhanced visual effects. The configuration of the security articles is such that a combination of optical interference patterns such as holographic or diffraction grating patterns with color shifting foils or inks decreases the possibility of counterfeiting. Furthermore, the articles of the invention allow a user to more easily view the image or diffraction effect in diffuse light without the need for direct specular light.

Generally, the configuration of the security articles of the present invention is such that the combination of a light transmissive substrate, having an interference pattern on the surface thereof, with color shifting optical coatings provides security features that make forgery or counterfeiting of an object difficult. The present invention combines the performance features of light interference effects with the diffractive effects of a diffractive surface such as a hologram. The security articles allow for ready identification by the average person while still preserving complex optical patterns, thus overcoming disadvantages of conventional holographic technology.

The various embodiments of the invention, described in further detail below, can be formed using three basic constructions. One involves substituting the aluminum reflector of a hologram or other diffractive surface with a thin film optical interference stack. This construction builds the hologram structure right into the optical interference stack. In this case, the optical coating is vacuum deposited directly onto the embossed surface. The second construction adds a thin film color shifting foil or ink to the side of a substrate opposite of the embossing. Whether foil or ink is used, the interference effect can be based on a metal-dielectric-absorber interference structure, or all-dielectric optical designs. The third approach involves laminating a color shifting optical coating structure, which can be digitally imaged

1 by laser ablation, reflective pattern etching, or chemical etching by photolithography, to a
2 diffractive surface such as a hologram.

3 Referring to the drawings, wherein like structures are provided with like reference
4 designations, Figure 1 depicts a security article 10 according to one embodiment of the
5 present invention. The security article 10 includes a light transmissive substrate 12 having
6 an optical interference pattern 14 such as an embossed image on an outer first surface
7 thereof. A color shifting optical coating 16 is formed on an opposing second surface of
8 substrate 12 and is discussed in further detail below. The combination of substrate 12 and
9 color shifting optical coating 16 forming security article 10 provides a security feature that
10 reduces the possibility of duplication, forgery and/or counterfeiting of an object having
11 security article 10 thereon.

12 The optical interference pattern 14 formed on the outer surface of light transmissive
13 substrate 12 can take various conventional forms including diffraction patterns such as
14 diffraction gratings, refraction patterns, holographic patterns such as two-dimensional and
15 three-dimensional holographic images, corner cube reflectors, Kinegram® devices,
16 Pixelgram® devices, zero order diffraction patterns, moiré patterns, or other light interference
17 patterns based on microstructures having dimensions in the range from about $0.1\mu\text{m}$ to about
18 $10\mu\text{m}$, preferably about $0.1\mu\text{m}$ to about $1\mu\text{m}$, and various combinations of the above such
19 as hologram/grating images, or other like interference patterns.

20 The particular methods and structures that form optical interference pattern 14 are
21 known by those skilled in the art. For example, embossing the light transmissive substrate
22 to form an interference pattern such as a hologram thereon can be done by well known
23 methods, such as embossing the surface of a plastic film by pressing it in contact with a
24 heated nickel embossing shim at high pressure. Other methods include photolithography,
25 molding of the plastic film against a patterned surface, and the like.
26

1 The Kinegram[®] device is a two-dimensional, computer-generated image (available
2 from OVD Kinegram Corp. of Switzerland) in which the individual picture elements are
3 filled with light-diffracting microstructures. These microstructures are extremely fine surface
4 modulations with typical dimensions of less than one micrometer.

5 Generally, moldable thermoformable materials are used to form light transmissive
6 substrate 12 and include, for example, plastics such as polyethylene terephthalate (PET),
7 especially PET type G, polycarbonate, acrylics such as polyacrylates including polymethyl
8 methacrylate (PMMA), polyacrylonitrile, polyvinyl chloride, polystyrene, cellulose diacetate
9 and cellulose triacetate, polypropylene, polydicyclopentadiene, mixtures or copolymers
10 thereof, and the like. In one preferred embodiment, light transmissive substrate 12 is
11 substantially composed of a transparent material such as polycarbonate. The substrate 12 is
12 formed to have a suitable thickness of about 3 μ m to about 100 μ m, and preferably a thickness
13 of about 12 μ m to about 25 μ m. In addition, substrate 12 can be made of one layer or multiple
14 layers of substrate materials. Generally, substrate 12 should have a lower melting point or
15 glass transition temperature than the optical coating, while being transparent.

16 In one method, substrate 12 can be produced from a thermoplastic film that has been
17 embossed by heat softening the surface of the film and then passing the film through
18 embossing rollers which impart the diffraction grating or holographic image onto the
19 softened surface. In this way, sheets of effectively unlimited length can be formed with the
20 diffraction grating or holographic image thereon. Alternatively, the diffractive surface can
21 be made by passing a roll of plastic film coated with an ultraviolet (UV) curable polymer,
22 such as PMMA, through a set of UV transparent rollers whereby the rollers set a diffractive
23 surface into the UV curable polymer and the polymer is cured by a UV light that passes
24 through the UV transparent rollers.

25 As shown in Figure 1, the color shifting optical coating 16 is a multilayer optical
26 interference stack or foil that includes an absorber layer 18, a dielectric layer 20, and a

1 reflector layer 22. The absorber layer 18 can be deposited on light transmissive substrate 12
2 by a conventional deposition process such as physical vapor deposition (PVD), sputtering,
3 or the like. The absorber layer 18 is formed to have a suitable thickness of about 30-300 Å
4 Angstroms (Å), and preferably a thickness of about 50-100 Å.

5 The absorber layer 18 can be composed of a semi-opaque material such as a grey
6 metal, including metals such as chromium, nickel, titanium, vanadium, cobalt, and
7 palladium, as well as other metals such as iron, tungsten, molybdenum, niobium, aluminum,
8 and the like. Various combinations and alloys of the above metals may also be utilized, such
9 as Inconel (Ni-Cr-Fe). Other absorber materials may also be employed in absorber layer 18
10 including metal compounds such as metal sub-oxides, metal sulfides, metal nitrides, metal
11 carbides, metal phosphides, metal selenides, metal silicides, and combinations thereof, as
12 well as carbon, germanium, ferric oxide, metals mixed in a dielectric matrix, and the like.

13 The dielectric layer 20 can be formed on absorber layer 18 by a conventional
14 deposition process such as PVD, chemical vapor deposition (CVD), plasma enhanced
15 chemical vapor deposition (PECVD), reactive DC sputtering, RF sputtering, or the like. The
16 dielectric layer 20 is formed to have an effective optical thickness for imparting color
17 shifting properties to security article 10. The optical thickness is a well known optical
18 parameter defined as the product ηd , where η is the refractive index of the layer and d is the
19 physical thickness of the layer. Typically, the optical thickness of a layer is expressed in
20 terms of a quarter wave optical thickness (QWOT) that is equal to $4\eta d/\lambda$, where λ is the
21 wavelength at which a QWOT condition occurs. The optical thickness of dielectric layer 20
22 can range from about 2 QWOT at a design wavelength of about 400 nm to about 9 QWOT
23 at a design wavelength of about 700 nm, and preferably 2-6 QWOT at 400-700 nm,
24 depending upon the color shift desired. Suitable materials for dielectric layer 20 include
25 those having a "high" index of refraction, defined herein as greater than about 1.65, as well
26 as those have a "low" index of refraction, which is defined herein as about 1.65 or less.

1 Examples of suitable high refractive index materials for dielectric layer 20 include
2 zinc sulfide (ZnS), zinc oxide (ZnO), zirconium oxide (ZrO₂), titanium dioxide (TiO₂),
3 carbon (C), indium oxide (In₂O₃), indium-tin-oxide (ITO), tantalum pentoxide (Ta₂O₅), ceric
4 oxide (CeO₂), yttrium oxide (Y₂O₃), europium oxide (Eu₂O₃), iron oxides such as
5 (II)diiron(III) oxide (Fe₃O₄) and ferric oxide (Fe₂O₃), hafnium nitride (HfN), hafnium carbide
6 (HfC), hafnium oxide (HfO₂), lanthanum oxide (La₂O₃), magnesium oxide (MgO),
7 neodymium oxide (Nd₂O₃), praseodymium oxide (Pr₆O₁₁), samarium oxide (Sm₂O₃),
8 antimony trioxide (Sb₂O₃), silicon carbide (SiC), silicon nitride (Si₃N₄), silicon monoxide
9 (SiO), selenium trioxide (Se₂O₃), tin oxide (SnO₂), tungsten trioxide (WO₃), combinations
10 thereof, and the like.

11 Suitable low refractive index materials for dielectric layer 20 include silicon dioxide
12 (SiO₂), aluminum oxide (Al₂O₃), metal fluorides such as magnesium fluoride (MgF₂),
13 aluminum fluoride (AlF₃), cerium fluoride (CeF₃), lanthanum fluoride (LaF₃), sodium
14 aluminum fluorides (*e.g.*, Na₃AlF₆ or Na₅Al₃F₁₄), neodymium fluoride (NdF₃), samarium
15 fluoride (SmF₃), barium fluoride (BaF₂), calcium fluoride (CaF₂), lithium fluoride (LiF),
16 combinations thereof, or any other low index material having an index of refraction of about
17 1.65 or less. For example, organic monomers and polymers can be utilized as low index
18 materials, including dienes or alkenes such as acrylates (*e.g.*, methacrylate), perfluoroalkenes,
19 polytetrafluoroethylene (Teflon), fluorinated ethylene propylene (FEP), combinations
20 thereof, and the like.

21 The reflector layer 22 can be formed on dielectric layer 20 by a conventional
22 deposition process such as PVD, sputtering, or the like. The reflector layer 22 is formed to
23 have a suitable thickness of about 300-1000 Å, and preferably a thickness of about 500-1000
24 Å. The reflector layer 22 is preferably composed of an opaque, highly reflective metal such
25 as aluminum, silver, copper, gold, platinum, niobium, tin, combinations and alloys thereof,
26 and the like, depending on the color effects desired. It should be appreciated that semi-

1 opaque metals such as grey metals become opaque at approximately 350-400 Å. Thus,
2 metals such as chromium, nickel, titanium, vanadium, cobalt, and palladium, or cobalt-nickel
3 alloys, could also be used at an appropriate thickness for reflector layer 22.

4 In addition, reflector layer 22 can be composed of a magnetic material such as a
5 cobalt-nickel alloy, or can be formed of a semitransparent material, to provide for machine
6 readability for security verification. For example, machine readable information may be
7 placed on a backing underlying the optical coating, such as personal identification numbers
8 (PINS), account information, business identification of source, warranty information, or the
9 like. In an alternative embodiment, reflector layer 22 can be segmented to allow for partial
10 viewing of underlying information either visually or through the use of various optical,
11 electronic, magnetic, or other detector devices. This allows for detection of information
12 below optical coating 16, except in those locations where reflector segments are located,
13 thereby enhancing the difficulty in producing counterfeits. Additionally, since the reflector
14 layer is segmented in a controlled manner, the specific information prevented from being
15 read is controlled, providing enhanced protection from forgery or alteration.

16 As shown in Figure 1, security article 10 can also optionally include an adhesive layer
17 24 such as a pressure sensitive adhesive on reflector layer 22. The adhesive layer 24 allows
18 security article 10 to be easily attached to a variety of objects such as credit cards, certificates
19 of authenticity, bank cards, banknotes, visas, passports, driver licenses, immigration cards,
20 and identification cards, as well as containers and other three-dimensional objects. The
21 adhesive layer 24 can be composed of a variety of adhesive materials such as acrylic-based
22 polymers, and polymers based on ethylene vinyl acetate, polyamides, urethane,
23 polyisobutylene, polybutadiene, plasticized rubbers, combinations thereof, and the like.
24 Alternatively, a hot stamping process, examples of which are discussed in further detail
25 below, can be utilized to attach security article 10 to an object. By using an
26 absorber/dielectric/reflector design for color shifting optical coating 16, such as shown in

1 Figure 1, high chroma variable color effects are achieved that are noticeable to the human
2 eye. Thus, an object having security article 10 applied thereto will change color depending
3 upon variations in the viewing angle or the angle of the object relative to the viewing eye,
4 as well as variations in angles of incident light. As a result, the variation in colors with
5 viewing angle increases the difficulty to forge or counterfeit security article 10. Furthermore,
6 the thin film interference color shifting coating changes the diffractive colors, either
7 suppressing, modifying or enhancing certain colors depending on the inherent color shifts
8 of the diffractive and thin film structures. By way of example, the color-shifts that can be
9 achieved utilizing color shifting optical coating 16 in accordance with the present invention
10 include, but are not limited to, gold-to-green, green-to-magenta, blue-to-red, green-to-silver,
11 magenta-to-silver, magenta-to-gold, etc.

12 The color shifting properties of optical coating 16 can be controlled through proper
13 design of the layers thereof. Desired effects can be achieved through the variation of
14 parameters such as thickness of the layers and the index of refraction of each layer. The
15 changes in perceived color which occur for different viewing angles or angles of incident
16 light are a result of a combination of selective absorption of the materials comprising the
17 layers and wavelength dependent interference effects. The interference effects, which arise
18 from the superposition of the light waves that have undergone multiple reflections and
19 transmissions within the multilayered structure, are responsible for the shifts in perceived
20 color with different angles.

21 Figure 2 depicts a security article 30 according to another embodiment of the present
22 invention. The security article 30 includes elements similar to those discussed above with
23 respect to security article 10, including a light transmissive substrate 12 formed with an
24 optical interference pattern 14 on an outer first surface thereof, and a color shifting optical
25 coating 16 formed on an opposing second surface of substrate 12. The optical coating 36 is
26 a multilayer film that includes an absorber layer 18, a dielectric layer 20 thereon, and another

1 coating 56 applied to an opposing second surface of substrate 12. The color shifting optical
2 coating 56 is formed from a layer of color shifting ink or paint that includes a polymeric
3 medium interspersed with a plurality of optical interference flakes having color shifting
4 properties.

5 The color shifting flakes of optical coating 56 are formed from a multilayer thin film
6 structure that includes the same basic layers as described above for the optical coating 16 of
7 security article 10. These include an absorber layer, a dielectric layer, and optionally a
8 reflector layer, all of which can be composed of the same materials discussed above in
9 relation to the layers of optical coating 16. The flakes can be formed to have a symmetrical
10 multilayer thin film structure, such as absorber/dielectric/reflector/dielectric/absorber, or
11 absorber/dielectric/absorber. Alternatively, the flakes can have a nonsymmetrical structure,
12 such as absorber/dielectric/reflector. The flakes are formed so that a dimension on any
13 surface thereof ranges from about 2 to about 200 microns.

14 Typically, the multilayer thin film structure is formed on a flexible web material with
15 a release layer thereon. The various layers are deposited on the web by methods well known
16 in the art of forming thin coating structures, such as PVD, sputtering, or the like. The
17 multilayer thin film structure is then removed from the web material as thin film color
18 shifting flakes, which can be added to a polymeric medium such as various pigment vehicles
19 for use as an ink or paint. In addition to the color shifting flakes, additives can be added to
20 the inks or paints to obtain desired color shifting results. These additives include lamellar
21 pigments such as aluminum flakes, graphite, mica flakes, and the like, as well as non-
22 lamellar pigments such as aluminum powder, carbon black, and other colorants such as
23 organic and inorganic pigments, and colored dyes.

24 Suitable embodiments of the flake structure are disclosed in a copending application
25 Serial Number 09/198,733, filed on November 24, 1998, and entitled "Color Shifting Thin
26 Film Pigments," which is incorporated herein by reference. Other suitable embodiments of

1 color shifting or optically variable flakes which can be used in paints or inks for application
2 in the present invention are described in U.S. Patent Nos. 5,135,812, 5,171,363, 5,278,590,
3 5,084,351, and 4,838,648, the disclosures of which are incorporated by reference herein.

4 The color shifting ink or paint utilized to form optical coating 56 on security article
5 50 can be applied by conventional coating devices and methods known to those skilled in the
6 art. These include, for example, various printing methods such as silk screen, intaglio,
7 gravure or flexographic methods, and the like. Alternatively, optical coating 56 can be
8 formed on security article 50 by coextruding a polymeric material containing color shifting
9 flakes, with the plastic material used to form substrate 12 having interference pattern 14.

10 An adhesive layer 24 such as a pressure sensitive adhesive can optionally be formed
11 on optical coating 56 as desired to allow attachment of security article 50 to an appropriate
12 surface of an object.

13 In another embodiment of the invention shown in Figure 5, a security article 60
14 includes elements similar to those discussed above with respect to security article 10,
15 including a light transmissive substrate 12 formed with an optical interference pattern 14 on
16 an outer first surface thereof. A color shifting optical coating 66 is provided in the form of
17 a foil that is laminated to a second opposing surface of substrate 12 by way of an adhesive
18 layer 62. The laminating adhesive may be composed of a pressure sensitive adhesive,
19 polyurethanes, acrylates, natural latex, or combinations thereof. The optical coating 16
20 includes an absorber layer 18, a dielectric layer 20 thereon, and a reflector layer 22 on
21 dielectric layer 20. The optical coating 16 is formed on a carrier sheet 64 prior to being
22 laminated to substrate 12. For example, the optical coating 16 can be deposited in a vacuum
23 roll coater onto a transparent plastic carrier sheet such as PET prior to lamination.

24 In alternative embodiments of security article 60, the optical coating can take the
25 form of a multilayer structure having absorber and dielectric layers with no reflector layer
26 such as in optical coating 36 of security article 30, or can take the form of an all dielectric

1 optical stack such as in optical coating 46 of security article 40. In addition, the optical
2 coating of security article 60 can take the form of a color shifting ink or paint layer such as
3 in optical coating 56 of security article 50.

4 Figure 6 depicts a security article 70 according to a further embodiment of the present
5 invention. The security article 70 includes elements similar to those discussed above with
6 respect to security article 60, including a light transmissive substrate 12 formed with an
7 optical interference pattern 14 on an outer first surface thereof. A color shifting optical
8 coating 76 is provided in the form of a foil that is laminated to a second opposing surface of
9 substrate 12 by way of an adhesive layer 62. The optical coating 76 includes an absorber
10 layer 18, a dielectric layer 20, and a reflector layer 22, which are formed on a carrier sheet
11 64 prior to being laminated to substrate 12. The optical coating 76 further includes an
12 essentially optically inactive interlayer 78 that is shear sensitive. The interlayer 78 is formed
13 between dielectric layer 20 and reflector layer 22 by a conventional coating process and is
14 composed of a very thin layer (*e.g.*, about 50-200 Å) of vapor deposited material such as
15 polytetrafluoroethylene, fluorinated ethylene propylene (FEP), silicone, carbon, combinations
16 thereof, or the like. The interlayer 78 makes it impossible to peel off security article 70 in
17 an undamaged state once it has been applied to an object.

18 It should be understood that the shear interlayer as described for security article 70
19 can be utilized if desired in the other above described embodiments that utilize an optical
20 coating comprising a multilayer foil. For example, Figure 7 depicts a security article 80
21 that includes essentially the same elements as those discussed above with respect to security
22 article 10, including a light transmissive substrate 12 having an optical interference pattern
23 14, and a color shifting optical coating 86 having an absorber layer 18, a dielectric layer 20,
24 and a reflector layer 22. The optical coating further includes an essentially optically inactive
25 interlayer 88 that is formed between dielectric layer 20 and reflector layer 22. An adhesive
26 layer 24 such as a pressure sensitive adhesive can optionally be formed on reflector layer 22,

1 or on an optional carrier sheet 64, such as a plastic sheet, to allow attachment of security
2 article 80 to an appropriate surface of an object. In the latter case, the absorber layer would
3 be adhesively bonded to light transmissive substrate 12 since carrier sheet 64 would carry the
4 layers 18, 20, 88, and 22.

5 Figure 8A depicts a security article 90 according to another embodiment of the
6 present invention in which the embossed surface of a substrate carries the optical coating.
7 The security article 90 includes elements similar to those discussed above with respect to
8 security article 10, including a light transmissive substrate 12 having an optical interference
9 pattern 14 embossed on a surface thereof, and a color shifting optical coating 96 that is a
10 multilayer film optical stack. The optical coating 96 is formed, however, on the same side
11 as the interference pattern on substrate 12 by conventional vacuum deposition processes.
12 The optical coating 96 includes an absorber layer 18, a dielectric layer 20 under absorber
13 layer 18, and a reflector layer 22 under dielectric layer 20. Alternatively, the order of layer
14 deposition can be reversed, *i.e.*, the absorber layer may be deposited first onto the optical
15 interference pattern, followed by the dielectric layer, and finally the reflective layer. In this
16 configuration, one can view the interference pattern such as a modified hologram by viewing
17 the security article through light transmissive substrate 12.

18 Each of these layers of optical coating 96 formed on substrate 12 preferably conforms
19 to the shape of the underlying interference pattern such as a holographic image, resulting in
20 the holographic structure being present at the outer surface of optical coating 96. This is
21 shown more clearly in the enlarged sectional view of security article 90 in Figure 8B. The
22 vacuum processing utilized in forming optical coating 96 or other multilayer coating will
23 maintain the holographic structure through the growing film so that the holographic image
24 is retained at the outer surface of optical coating 96. This is preferably accomplished by a
25 directed beam of vapor essentially normal to the coated surface. Such processing tends to
26 replicate the initial structure throughout the optical stack to the outer surface.

1 An adhesive layer 24 such as a pressure sensitive adhesive can be optionally formed
2 on a surface of substrate 12 opposite from optical coating 96 to allow attachment of security
3 article 90 to an appropriate surface of an object.

4 It should be understood that in alternative embodiments of security article 90, optical
5 coating 96 can take the form of a multilayer structure having absorber and dielectric layers
6 with no reflector layer such as in optical coating 36 of security article 30, or can take the
7 form of an all-dielectric optical stack such as in optical coating 46 of security article 40.

8 Figure 9 depicts a security article 100 according to another embodiment of the present
9 invention which is formed from a master shim 102 used to replicate an interference structure
10 such as a hologram in an optical stack. The master shim 102 is composed of a metallic
11 material such as nickel, tin, chromium, or combinations thereof, and has a holographic or
12 diffractive pattern 104 formed thereon. An optical coating 106 is formed on pattern 104 by
13 conventional vacuum deposition processes such as physical vapor deposition. The optical
14 coating 106 includes a release layer (not shown) directly deposited onto pattern 104, an
15 absorber layer 18, a dielectric layer 20 on absorber layer 18, and a reflector layer 22 on
16 dielectric layer 20. The release layer may be composed of a material such as gold, silicone,
17 or a low surface energy material such as FEP. The dielectric layer is preferably a low index
18 material such as MgF_2 or SiO_2 because of the stress benefits provided. Each of these layers
19 of optical coating 106 is formed on master shim 102 so as to conform to the shape of the
20 underlying holographic or diffractive pattern 104. A receiver sheet 108 such as a plastic
21 sheet with an adhesive (not shown) is attached to reflector layer 22. The optical coating 106
22 can then be stripped away from master shim 102 onto receiver sheet 108 for attachment onto
23 an object, leaving the holographic or diffractive pattern replicated in optical coating 106.

24 In alternative embodiments of security article 100, optical coating 106 can take the
25 form of a multilayer structure having absorber and dielectric layers with no reflector layer
26

1 such as in optical coating 36 of security article 30, or can take the form of an all-dielectric
2 optical stack such as in optical coating 46 of security article 40.

3 In the following embodiments, various security articles are formed by laminating
4 laser imaged optical coating structures to embossed substrates. Lamination provides the
5 advantage of being cost effective and secure since the two expensive security components
6 (*i.e.*, the color shifting film and hologram) are kept separate until laminated together. The
7 laminated articles can include either a color shifting foil or ink, which can be used as the
8 background underneath a holographic image, with the holographic image capable of being
9 seen only at selected angles. The hologram is thus seen superimposed on a color shifting
10 background that also has an associated image.

11 In the embodiment illustrated in Figures 10A and 10B, a security article 110 is
12 provided with laser ablated images formed in a color shifting optical coating 116. As shown
13 in Figure 10A, optical coating 116 is formed on a carrier sheet 64 such as transparent PET
14 by conventional coating processes to form a prelamine structure 117. The optical coating
15 116 is formed by depositing a reflector layer 22 on carrier sheet 64, followed by deposition
16 of a dielectric layer 20 and an absorber layer 18. A laser ablated image 118 is then formed
17 in optical coating 116 on prelamine structure 117 by a conventional laser imaging system
18 The laser ablated image 118 can take the form of digital images (*e.g.*, pictures of people,
19 faces), bar codes, covert (*i.e.*, microscopic) data and information, or combinations thereof.
20 The laser imaging can be accomplished by using a semiconductor diode laser system such
21 as those available from Presstek, Inc. and disclosed in U.S. Patent Nos. 5,339,737 and
22 Re. 35,512, the disclosures of which are incorporated by reference herein. Alternatively,
23 reflective pattern etching, or chemical etching by photolithography can be utilized to form
24 various images in the optical coating.

25 The prelamine structure 117 with laser ablated image 118 is then laminated to a
26 a light transmissive substrate 12 having an optical interference pattern 14, such as a

1 diffractive or holographic pattern on a surface thereof, as shown in Figure 10B. The
2 prelamine structure 117 is laminated to substrate 12 through adhesive layer 62 at a surface
3 opposite from interference pattern 14 to form the completed security article 110.
4 Alternatively, prelamine structure 117 can be laminated on the embossed surface of
5 substrate 12. In the latter case, the device is viewed through transmissive substrate 12. In
6 such a case, a high index transparent layer must be in place on the embossed surface so that
7 index matching between the adhesive and embossed surface does not occur. Suitable
8 examples of such a high index transparent layer include TiO_2 or ZnS .

9 It should be understood that prelamine structure 117 can be used as a final product
10 if desired without subsequent lamination to an embossed substrate. In this case, prelamine
11 structure 117 could be directly attached to an object by use of an adhesive or other
12 attachment mechanism. The prelamine structure can also be prepared by directly laser
13 ablating a suitable optically variable layer which has been directly deposited onto a
14 holographic or diffractive substrate.

15 Figure 11 shows a security article 120 according to another embodiment of the
16 invention which includes elements similar to those discussed above with respect to security
17 article 110, including a light transmissive substrate 12 having an optical interference pattern
18 14 such as a holographic or diffractive pattern, and a color shifting optical coating 126 that
19 is laminated to substrate 12 by an adhesive layer 62. The optical coating 126 includes an
20 absorber layer 18, a dielectric layer 20, and a reflector layer 22. The optical coating 126 is
21 deposited on a carrier sheet 64 to form a prelamine structure prior to being laminated to
22 substrate 12. The prelamine structure is subjected to a laser imaging process such as
23 described above for security article 110 in order to form a laser scribed number 122 such as
24 a serial number for use in serialized labels.

25 Figure 12 depicts a security article 130 according to a further embodiment of the
26 invention which includes elements similar to those discussed above with respect to security

1 articles 110 and 120, including a light transmissive substrate 12 formed with a holographic
2 or diffractive pattern, and a color shifting optical coating 136 that is laminated to substrate
3 12 by an adhesive layer 62. The optical coating 136 includes an absorber layer 18, a
4 dielectric layer 20, and a reflector layer 22 as described above. The optical coating 136 is
5 deposited on a carrier sheet 64 to form a prelamine structure prior to being laminated to
6 substrate 12. The prelamine structure is subjected to a laser imaging process such as
7 described above for security articles 110 and 120 in order to form both a laser ablated image
8 118 as well as a laser scribed number 122, thereby combining the features of security articles
9 110 and 120.

10 In an additional embodiment of the invention illustrated in Figure 13, a security
11 article 140 includes elements similar to those discussed above with respect to security
12 articles 130, including a light transmissive substrate 12 formed with an optical interference
13 pattern 14, and a color shifting optical coating 146 that is laminated to a substrate 12 by way
14 of an adhesive layer 62. The optical coating 146 includes an absorber layer 18, a dielectric
15 layer 20, and a reflector layer 22 as described above, with optical coating 146 being
16 deposited on a carrier sheet 64 to form a prelamine structure prior to being laminated to
17 substrate 12. The prelamine structure is subjected to a laser imaging process such as
18 described above for security article 130 in order to form both a laser ablated image 118 as
19 well as a laser scribed number 122. In addition, a covert resistive layer 148 is formed on
20 substrate 12 over interference pattern 14. The covert resistive layer 148 is composed of a
21 transparent conductive material such as indium tin oxide (ITO), indium oxide, cadmium tin
22 oxide, combinations thereof, and the like, and provides enhanced features to security article
23 140 such as a defined electrical resistance. Such covert resistive layers are described in U.S.
24 Patent Application Serial No. 09/094,005, filed June 9, 1998, the disclosure of which is
25 incorporated herein by reference. The covert resistive layer can be applied to other
26 embodiments of the invention if desired.

1 It should be understood that the above embodiments depicted in Figures 10-13 could
2 alternatively be laminated obversely such that the embossed surface with a high index
3 transparent dielectric layer is adjacent to the laminating adhesive and optical coating. For
4 example, Figure 14 depicts a security article 150 which includes essentially the same
5 elements security articles 130, including a light transmissive substrate 12 with an optical
6 interference pattern 14, and a color shifting optical coating 156 that is laminated to substrate
7 12 by way of an adhesive layer 62. The optical coating 156 includes an absorber layer 18,
8 a dielectric layer 20, and a reflector layer 22. The optical coating 156 is deposited on a
9 carrier sheet 64 to form a prelamine structure prior to being laminated to substrate 12. The
10 prelamine structure is subjected to a laser imaging process to form both a laser ablated
11 image 118 as well as a laser scribed number 122. As shown in Figure 14, the optical coating
12 156 is laminated to substrate 12 so as to be adjacent to optical interference pattern 14 such
13 as a holographic or diffractive pattern.

14 In various alternative embodiments of the security articles depicted in Figures 10-14,
15 the optical coating can take the form of a multilayer structure having absorber and dielectric
16 layers with no reflector layer such as in optical coating 36 of security article 30, or can take
17 the form of an all-dielectric optical stack such as in optical coating 46 of security article 40.
18 In addition, the optical coating of these security articles can take the form of a color shifting
19 ink or paint layer such as in optical coating 56 of security article 50. Such alternative optical
20 coatings would be formed directly on carrier sheet 64 prior to laser imaging and subsequent
21 lamination.

22 It should be understood that the color shifting optical coatings deposited directly on
23 embossed substrates, such as shown in the embodiments of Figures 1-4 and 7-9, can also be
24 imaged if desired, such as by laser ablation as discussed above.

25 The security articles of the invention can be transferred and attached to various
26 objects by a variety of attachment processes. One preferred process is hot stamping, which

1 is shown schematically in Figures 15 and 16. A hot stamp structure 160 according to one
2 embodiment is illustrated in Figure 15 and includes a carrier sheet 162 having a thermal
3 release layer 164 on one surface thereof. An embossed substrate 12 having an interference
4 pattern 14 plus a high index transparent layer (not shown) on interference pattern 14 is
5 attached to release layer 164 so that the release layer is on the side opposite of the
6 embossing. A color shifting optical coating 166 which has been applied to substrate 12 as
7 a solution coating of ink is interposed between substrate 12 and a thermally activated
8 adhesive layer 168.

9 Generally, carrier sheet 162 can be composed of various materials such as plastics
10 with various thicknesses which are known by those skilled in the art. For example, when
11 carrier sheet 162 is formed of PET, the thickness preferably ranges from about 10 μm to
12 about 75 μm . Other materials and thickness ranges are applicable in light of the teachings
13 contained herein. Furthermore, carrier sheet 162 can be part of various manufacturing belts
14 or other processing structures that assist in transferring the security article to a desired object.

15 The release layer 164 is composed of a suitable material to allow substrate 12 to be
16 removed from carrier sheet 162 during the hot stamping process. The release layer 164 may
17 be a polymeric material such as polyvinyl chloride, polystyrene, chlorinated rubber,
18 acrylonitrile-butadiene-styrene (ABS) copolymer, nitrocellulose, methyl methacrylate, acrylic
19 copolymers, fatty acids, waxes, gums, gels, mixtures thereof, and the like. The release layer
20 164 can have a thickness of about 1 μm to about 25 μm .

21 The thermally activated adhesive layer 168 can be composed of various adhesive
22 materials such as acrylic-based polymers, ethylene vinyl acetate, polyamides, combinations
23 thereof, and the like. The adhesive layer 168 can have a thickness of about 2 μm to about
24 20 μm .

25 During the hot stamping process, carrier sheet 162 is removed by way of release layer
26 164 from substrate 12 after hot stamp structure 160 has been pressed onto a surface of an

The hot stamping process for hot stamp structure 170 is the same as that described above for hot stamp structure 160. The carrier sheet 162 is removed by way of release layer 164 from substrate 12 after hot stamp structure 170 has been pressed onto a surface of an

object 169, with the security article composed of substrate 12 and optical coating 176 being bonded to object 169 by adhesive layer 168.

It should be understood that various of the other embodiments of the security article of the invention described previously can be adapted for a hot stamping process.

Alternatively, a cold transfer process using a UV activated adhesive can be utilized to attach the security articles of the invention to various objects. Such a process is described in a paper by I.M. Boswarva et al., *Roll Coater System for the Production of Optically Variable Devices (OVD's) for Security Applications*, Proceedings, 33rd Annual Technical Conference, Society of Vacuum Coaters, pp. 103-109 (1990), the disclosure of which is incorporated by reference herein.

The various security articles as described above can be used in a variety of applications to provide for enhanced security measures such as anticounterfeiting. The security articles can be utilized in the form of a label, tag, ribbon, security thread, tape, and the like, for application in a variety of objects such as security documents, security labels, financial transaction cards, monetary currency, credit cards, merchandise packaging, license cards, negotiable notes, stock certificates, bonds such as bank or government bonds, paper, plastic, or glass products, or other similar objects. Preferred applications for the security articles of the invention are in the following areas; 1) rigid substrate security products, such as payment cards, "smart cards," and identification cards; 2) laminated products, including driving licenses, security passes, border crossing cards, and passports; and 3) "one trip" security items such as tax stamps, banderoles, package seals, certificates of authenticity, gift certificates, etc.

The above applications share some common considerations. In these applications, the holographic or other diffractive structure is best presented and protected by a rigid substrate and overlay lamination, or if these are not used, the application should be one that does not require long circulation life and extensive handling. An over-riding factor is that

1 the application document must depend on a limited array of security devices and a relatively
2 non-skilled observer must be able to easily authenticate the devices. Credit cards, for
3 example, usually depend on one major security device, and secondary devices such as
4 printing techniques, for their authentication. The arsenal of tools available for banknote
5 security (watermarks, intaglio, special paper, threads, etc.) cannot be applied to rigid opaque
6 substrates. The security device of the invention, therefore, can be a very cost-effective
7 "defensive shield" readily discerned by the public, and integrated into the overall style of the
8 security document.

9 The security devices of the present invention also have the advantage of being suited
10 to automated machine verification, while at the same time preserving an easily remembered
11 feature, namely, a distinct color shift as the viewing angle is changed. Security can be
12 further heightened by the incorporation of digital information that can be compared to the
13 same image in photographic form. While the creative computer hacker might find ways to
14 simulate a simple logo on a decorative holographic substrate, simulation of the color shifting
15 background using an ink-jet printer is not possible and images cannot be created that appear
16 only at certain viewing angles.

17 While conventional holograms provide an element of protection in document
18 security, such holograms are difficult for the lay person to authenticate decisively since they
19 exhibit eye-catching appeal, but do not naturally lead the observer into a correct
20 determination. Building on the eye-catching appeal of holograms, the security articles of the
21 invention add distinctive elements which are both easy to authenticate and difficult to
22 replicate or simulate.

23 The following examples are given to illustrate the present invention, and are not
24 intended to limit the scope of the invention.
25
26

Example 1

Optical coatings composed of color shifting flakes in a polymeric vehicle were formed by a drawdown process on light transmissive substrates composed of PET films containing a holographic image. The drawdown vehicle included two parts lacquer/catalyst and one part color shifting flakes. The color shifting flakes utilized had color shifting properties of green-to-magenta, blue-to-red, and magenta-to-gold.

Example 2

A color shifting optical coating having a three-layer design was formed on an embossed transparent film to produce a security article. The optical coating was formed on the flat surface of the transparent film on the side opposite from the embossed surface. The optical coating was formed by depositing an absorber layer composed of chromium on the flat surface of the transparent film, depositing a dielectric layer composed of magnesium fluoride on the absorber layer, and depositing a reflector layer of aluminum on the dielectric layer.

Alternatively, the aluminum layer can be deposited so that it is essentially transparent. This would allow printed information on an object to be read underneath the optical coating. Further, the reflector layer can alternatively be composed of a magnetic material. Such a magnetic feature in the color shifting component when added to the holographic component would give three independent security features to the security article.

The embossed film and optical coating forming the security article can be rigidly affixed to a carrier substrate, or can be attached to a release layer so that the security article can be hot stamped to a surface of an object. In addition, the hot stamped image of the color shifting thin film can be in the form of a pattern, as for example, dots, lines, logos, or other images. This pattern of optically variable effects will add an even greater degree of deterrence to counterfeiting.

Example 3

A security article was formed by laminating a laser imaged optical coating structure to an embossed substrate according to the present invention. The security article included four main parts: 1) A laser ablated image, 2) a laser ablated bar code or serial number, 3) a multilayer color shifting thin film, and 4) a holographic image.

The color shifting thin film was deposited in a vacuum roll coater onto a clear polyester (PET) substrate that was 1 mil thick. The thin film was formed by depositing a metal layer of aluminum on the substrate, followed by a dielectric layer composed of magnesium fluoride being deposited on the metal layer, and an absorber layer composed of chromium being deposited on the dielectric layer. Thereafter, the thin film was subjected to laser ablation using a laser diode imaging system based on the Heidelberg Quickmaster printing system to provide digital encoding. The imaging system used a high-resolution diode laser array with a spot size of approximately 30 microns. After the digital information had been encoded into the thin film, a plastic film embossed with a hologram was laminated to the thin film using a pressure sensitive adhesive to produce the completed security article. The hologram word "security" was placed upside down so as to place the embossed surface close to the thin film as well as to protect the image. The finished structure of the security article was similar to that shown for the embodiment of Figure 14 described above.

Upon visual inspection, the security article had three distinct images as it was rotated back and forth. At normal viewing, a profile of a woman's face created by laser ablation was seen in a magenta color, which at high angle shifted to a green color. This color shift was easy to see under various lighting conditions and it is easy to recall this simple color shift. At an intermediate angle, the hologram appeared with its multitude of facets of color and images.

Example 4

The security article of Example 3 was subjected to various tests to measure its optical performance, which are described as follows.

A. Instrumentation and Sample Orientation

A Zeiss GK/311M goniospectrophotometer using a xenon flash lamp with angle adjustable fiber optics for both illumination and reflectance was used to characterize the security article. Three types of viewing conditions were examined, with the geometries utilized shown in Figures 17A and 17B. These viewing conditions included: a) set angle of illumination at 45 degrees, with the angles of measurement being 5 degree increments from 65 through 155 degrees (Figure 17A); b) off-gloss, with the angles of illumination being 5 degree increments from 25 through 75 degrees and the angles of measurement being 5 degree increments from 100 through 150 degrees (Figure 17B); and c) on-gloss (specular), with the angles of illumination being 5 degree increments from 25 through 80 degrees and the angles of measurement being 5 degree increments from 100 through 155 degrees (Figure 17B). Calibration for all these geometries was made with a white tile. To test whether any orientation effects were present, the security article was oriented at 0, 90, 180 and 270 degrees with respect to the viewing optics for each viewing condition.

B. Optical Results

The results of optical testing for the three viewing conditions are described below. The measurements indicate that it is possible to uniquely characterize the interference optically variable effects separately from the diffractive effects.

1. Set Angle of Illumination

In this configuration, the optical properties of the hologram dominated the spectral response, but only in two orientations, at 90° and 270° (*i.e.*, at 90° to the grooves of the

1 hologram). Inspection of the spectral profiles shown in the graph of Figure 18 show that the
2 various diffractive orders of the hologram predominate. Only at small and large angle
3 differences does the color shifting thin film show its spectra. A comparison of the color
4 trajectory in CIE Lab color space in Figure 19 shows that the resultant color travel for the
5 security device is due mostly to the hologram. The chroma or color saturation of the
6 hologram is high as can be seen by the large excursions from the achromatic point ($a^* = b^*$
7 $= 0$).

8 2. Off-Gloss Geometry

9 In contrast to those spectral profiles found above, the off-gloss measurements showed
10 that in this geometry, the color shifting thin film now dominated the optical response,
11 irrespective of sample orientation. While there was no evidence of optical effects from the
12 hologram in the 0° orientation, combined optical effects from the hologram and the thin film
13 optical stack were seen in the 90° orientation. The spectral peaks arising from the optical
14 stacks were modified as shown in Figure 20. The spectral profiles are typical of metal-
15 dielectric-absorber optical stacks where the spectrum and the resultant color move to shorter
16 wavelengths as the view angle increases. It is interesting to note that in this configuration,
17 the brightness, L^* moves from high to low as the color changes from magenta-to-yellow. At
18 the $0^\circ/180^\circ$ orientation, the hologram showed no spectral peaks.

20 3. On-Gloss Geometry

21 In the on-gloss geometry, the security article showed two distinct features: one at 0° ,
22 180° and one at $90^\circ, 270^\circ$. In the first orientation, the only optical effect was the one typical
23 from a color shifting thin film where the color shifts to shorter wavelengths as the angle of
24 incidence is increased. Figure 21 is a graph showing the on-gloss spectral profiles for the
25 security article at the first orientation. The color shifts from magenta to green. Peak
26 suppression occurs progressively as the peaks move toward the shorter wavelengths. This

1 suppression is caused, in part, by the higher reflectance values arising from the standard
2 white tile as well as from the security article itself. Theoretically, the spectra of the thin film
3 retain the same spectrum, but shift to shorter wavelengths as the angle of incidence increases.
4 It should be noted that the on-gloss orientation at 0° , 180° is well suited to machine reading
5 since the peaks are well defined for the optical stack and are free of holographic features.

6 In the second orientation, the spectral peaks arising from the optical stack, at the high
7 angles of incidence, show large optical interactions with the hologram. Figure 22 is a graph
8 showing the on-gloss spectral profiles for the security article at the second orientation.

9
10 C. Optical Microscopy

11 The security article was viewed on a Zeiss optical microscope to see the digital
12 features encoded into the color shifting thin film. Figure 23 is a photomicrograph of the
13 digital image (magnified 50x) in the thin film optical stack of the security article. In Figure
14 23, the digital dots (ablation holes), where the entire optical stack is missing, have
15 dimensions on the order of about 100 microns. Each 100 micron pixel is actually made up
16 of 30 micron overlapping digital dots. Thus, it is possible to write covert information with
17 30-100 micron pixel resolution, a resolution below the eye detection limit. The cracking
18 observed in the coating is typical of dielectric films that have undergone stress relief. These
19 cracks do not have any detrimental effect either on the optical properties or adhesion of the
20 thin film.

21
22 Example 5

23 A color shifting optical stack having a three-layer design was formed on an embossed
24 transparent plastic film by direct vacuum coating of the optical stack onto a holographic
25 surface to produce a security article. During the fabrication process, the standard aluminum
26 layer was removed from a commercially available hologram by a dilute solution of sodium

1 hydroxide. After rinsing and drying, the embossed surface was coated in vacuum with a
2 layer of semi-transparent metal, a layer of low index dielectric material, and finally an
3 opaque layer of aluminum, by physical vapor deposition processes. This thin film optical
4 stack was a Fabry-Perot filter centered at 500 nanometers. The layers could be coated in the
5 opposite direction with a corresponding change in which side of the plastic film was
6 modified by the optical stack.

7 When this construction was viewed through the plastic film, a superposition of the
8 hologram and the optical stack was seen. In essence the rainbow of colors that were in the
9 initial hologram have been modified by the optical stack whereby some colors are
10 accentuated and some are suppressed. Actually, the hologram could be viewed from both
11 sides; on the aluminum side the original hologram can be seen, and on the other side, the
12 superposition of the hologram and the optical stack can be seen through the plastic film.

13 A close examination of the optical stack by scanning electron microscopy (SEM)
14 showed that the diffractive surface pattern of the hologram was replicated up through the
15 optical stack so that the holographic image was preserved in the aluminum surface. This is
16 depicted in Figures 24A and 24B, which are photomicrographs of SEM images (magnified
17 2000x and 6000x, respectively) showing holographic relief at the top of the optical stack of
18 the security article.

1 The present invention may be embodied in other specific forms without departing
2 from its spirit or essential characteristics. The described embodiments are to be considered
3 in all respects only as illustrative and not restrictive. The scope of the invention is, therefore,
4 indicated by the appended claims rather than by the forgoing description. All changes which
5 come within the meaning and range of equivalency of the claims are to be embraced within
6 their scope.

7 What is claimed and desired to be secured by United States Letters Patent is:
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26

- 1 1. A security article comprising:
 - 2 a light transmissive substrate having a first surface and an opposing second
 - 3 surface, the first surface having an optical interference pattern;
 - 4 a color shifting optical coating on the second surface of the substrate, the
 - 5 optical coating providing an observable color shift as the angle of incident light or
 - 6 viewing angle changes; and
 - 7 an adhesive layer on the optical coating.
- 8
- 9 2. The security article of claim 1, wherein the substrate comprises a plastic
- 10 material.
- 11
- 12 3. The security article of claim 2, wherein the plastic material is selected from
- 13 the group consisting of polyethylene terephthalate, polycarbonate, polyvinyl chloride,
- 14 polyacrylates, polyacrylonitrile, polystyrene, polypropylene, cellulose diacetate, cellulose
- 15 triacetate, polydicyclopentadiene, and mixtures and copolymers thereof.
- 16
- 17 4. The security article of claim 1, wherein the optical interference pattern is
- 18 selected from the group consisting of a diffraction grating pattern, refraction pattern,
- 19 holographic image pattern, corner cube reflector, zero order diffraction pattern, moiré pattern,
- 20 and combinations thereof.
- 21
- 22 5. The security article of claim 1, wherein the optical interference pattern is
- 23 selected from the group consisting of a Kinegram® device, and a Pixelgram® device.
- 24
- 25
- 26

1 6. The security article of claim 1, wherein the optical interference pattern is a
2 light interference pattern based on microstructures having dimensions of from about $0.1\mu\text{m}$
3 to about $10\mu\text{m}$.

4
5 7. The security article of claim 1, wherein the color shifting optical coating is
6 a multilayer optical interference film including an absorber layer on the second surface of the
7 substrate, and a dielectric layer on the absorber layer.

8
9 8. The security article of claim 1, wherein the color shifting optical coating is
10 a multilayer optical interference film including an absorber layer on the second surface of the
11 substrate, a dielectric layer on the absorber layer, and a reflector layer on the dielectric layer.

12
13 9. The security article of claim 1, wherein the color shifting optical coating is
14 a multilayer optical interference film including a first absorber layer on the second surface
15 of the substrate, a dielectric layer on the first absorber layer, and a second absorber layer on
16 the dielectric layer.

17
18 10. The security article of claim 1, wherein the color shifting optical coating is
19 a multilayer optical interference film comprising alternating layers of low and high index of
20 refraction dielectric layers.

21
22 11. The security article of claim 1, wherein the color shifting optical coating
23 comprises a plurality of multilayer optical interference flakes dispersed in a polymeric
24 medium.

25
26

1 12. The security article of claim 1, wherein the color shifting optical coating is
2 a multilayer optical interference film including an absorber layer on the second surface of the
3 substrate, a dielectric layer on the absorber layer, a thin shear layer on the dielectric layer,
4 and a reflector layer on the shear layer.

5
6 13. The security article of claim 12, wherein the shear layer has a thickness from
7 about 50 Å to about 200 Å.

8
9 14. The security article of claim 1, wherein the combination of the optical
10 interference pattern and the color shifting optical coating produce unique colors with viewing
11 angle changes not achievable with either the optical interference pattern or the color shifting
12 optical coating alone.

13
14 15. The security article of claim 1, wherein the color shifting optical coating
15 includes a laser ablated image formed therein.

16
17 16. The security article of claim 15, wherein the laser ablated image is selected
18 from the group consisting of digital images, bar codes, covert data, and combinations thereof.

19
20 17. The security article of claim 1, wherein the color shifting optical coating
21 includes a laser scribed number.

22
23 18. The security article of claim 15, wherein the color shifting optical coating
24 further includes a laser scribed number.

1 19. A security article comprising:

2 a light transmissive substrate having a first surface and an opposing second
3 surface, the first surface having an optical interference pattern;

4 a color shifting optical coating on a carrier sheet, the optical coating
5 laminated to the second surface of the substrate by an adhesive layer, the optical
6 coating providing an observable color shift as the angle of incident light or viewing
7 angle changes.

8
9 20. The security article of claim 19, wherein the optical interference pattern is
10 selected from the group consisting of a diffraction grating pattern, refraction pattern,
11 holographic image pattern, corner cube reflector, zero order diffraction pattern, moiré pattern,
12 and combinations thereof.

13
14 21. The security article of claim 19, wherein the optical interference pattern is
15 selected from the group consisting of a Kinegram® device, and a Pixelgram® device.

16
17 22. The security article of claim 19, wherein the optical interference pattern is a
18 light interference pattern based on microstructures having dimensions of from about 0.1 μm
19 to about 10 μm.

20
21 23. The security article of claim 19, wherein the color shifting optical coating is
22 a multilayer optical interference film including a reflector layer on the carrier sheet, a
23 dielectric layer on the reflector layer, and an absorber layer on the dielectric layer.

1 24. The security article of claim 19, wherein the color shifting optical coating is
2 a multilayer optical interference film including a first absorber layer on the carrier sheet, a
3 dielectric layer on the first absorber layer, and a second absorber layer on the dielectric layer.

4
5 25. The security article of claim 19, wherein the color shifting optical coating is
6 a multilayer optical interference film comprising alternating layers of low and high index of
7 refraction dielectric layers.

8
9 26. The security article of claim 19, wherein the color shifting optical coating
10 comprises a plurality of multilayer optical interference flakes dispersed in a polymeric
11 medium.

12
13 27. The security article of claim 19, wherein the color shifting optical coating is
14 a multilayer optical interference film including a reflector layer on the carrier sheet, a thin
15 shear layer on the reflector layer, a dielectric layer on the shear layer, and an absorber layer
16 on the dielectric layer.

17
18 28. The security article of claim 27, wherein the shear layer has a thickness from
19 about 50 Å to about 200 Å.

20
21 29. The security article of claim 19, wherein the color shifting optical coating
22 includes a laser ablated image formed therein.

23
24 30. The security article of claim 29, wherein the laser ablated image is selected
25 from the group consisting of digital images, bar codes, covert data, and combinations thereof.
26

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26

31. The security article of claim 19, wherein the color shifting optical coating includes a laser scribed number.

32. The security article of claim 29, wherein the color shifting optical coating further includes a laser scribed number.

33. The security article of claim 29, further comprising a covert resistive layer on the first surface of the substrate.

34. The security article of claim 33, wherein the covert resistive layer is composed of a transparent conductive material selected from the group consisting of indium tin oxide, indium oxide, cadmium tin oxide, and combinations thereof.

a light transmissive substrate having a first surface and an opposing second surface, the first surface having an optical interference pattern;

a color shifting optical coating on a carrier sheet, the optical coating laminated to the first surface of the substrate by an adhesive layer, the optical coating providing an observable color shift as the angle of incident light or viewing angle changes.

36. The security article of claim 35, wherein the optical interference pattern is selected from the group consisting of a diffraction grating pattern, refraction pattern, holographic image pattern, corner cube reflector, zero order diffraction pattern, moiré pattern, and combinations thereof.

37. The security article of claim 35, wherein the optical interference pattern is selected from the group consisting of a Kinegram® device, and a Pixelgram® device.

38. The security article of claim 35, wherein the optical interference pattern is a light interference pattern based on microstructures having dimensions of from about $0.1\mu\text{m}$ to about $10\mu\text{m}$.

39. The security article of claim 35, wherein the color shifting optical coating is a multilayer optical interference film including a reflector layer on the carrier sheet, a dielectric layer on the reflector layer, and an absorber layer on the dielectric layer.

1 40. The security article of claim 35, wherein the color shifting optical coating is
2 a multilayer optical interference film including a first absorber layer on the carrier sheet, a
3 dielectric layer on the first absorber layer, and a second absorber layer on the dielectric layer.
4

5 41. The security article of claim 35, wherein the color shifting optical coating is
6 a multilayer optical interference film comprising alternating layers of low and high index of
7 refraction dielectric layers.
8

9 42. The security article of claim 35, wherein the color shifting optical coating
10 comprises a plurality of multilayer optical interference flakes dispersed in a polymeric
11 medium.
12

13 43. The security article of claim 35, wherein the color shifting optical coating
14 includes a laser ablated image formed therein.
15

16 44. The security article of claim 35, wherein the color shifting optical coating
17 includes a laser scribed number.
18

19 45. The security article of claim 43, wherein the color shifting optical coating
20 further includes a laser scribed number.
21

22 46. The security article of claim 43, further comprising a covert resistive layer on
23 the second surface of the substrate.
24
25
26

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26

47. A prelamine color shifting structure comprising:
a light transmissive carrier sheet;
a color shifting optical coating formed on the carrier sheet, the optical coating providing an observable color shift as the angle of incident light or viewing angle changes; and
a laser ablated image and/or a laser scribed number formed in the optical coating.

48. The prelamine color shifting structure of claim 47, wherein the laser ablated image is selected from the group consisting of digital images, bar codes, covert data, and combinations thereof.

1 49. A security article comprising:

2 a light transmissive substrate having a first surface and an opposing second
3 surface, the first surface having an optical interference pattern; and

4 a color shifting optical coating on the first surface of the substrate, the optical
5 coating providing an observable color shift as the angle of incident light or viewing
6 angle changes.

7
8 50. The security article of claim 49, further comprising an adhesive layer on the
9 second surface the substrate.

10
11 51. The security article of claim 49, wherein the color shifting optical coating is
12 a multilayer optical interference film including a reflector layer on the first surface of the
13 substrate, a dielectric layer on the reflector layer, and an absorber layer on the dielectric layer.

14
15 52. The security article of claim 49, wherein the color shifting optical coating is
16 a multilayer optical interference film including a first absorber layer on the first surface of
17 the substrate, a dielectric layer on the first absorber layer, and a second absorber layer on the
18 dielectric layer.

19
20 53. The security article of claim 49, wherein the color shifting optical coating is
21 a multilayer optical interference film comprising alternating layers of low and high index of
22 refraction dielectric layers.

1 54. A method of forming a security article, comprising the steps of:
2 obtaining a master shim having a first surface with a holographic or
3 diffractive pattern thereon;
4 forming a color shifting optical coating on the first surface of the master shim
5 so as to conform to the shape of the holographic or diffractive pattern;
6 affixing a carrier substrate layer to the optical coating; and
7 removing the optical coating and carrier substrate layer from the master shim
8 to produce a security article with the holographic or diffractive pattern replicated in
9 the optical coating, the optical coating providing an observable color shift to the
10 security article as the angle of incident light or viewing angle changes.
11

12 55. The method of claim 54, wherein the master shim is composed of a metallic
13 material selected from the group consisting of nickel, tin, chromium, and combinations
14 thereof.
15

16 56. The method of claim 54, wherein the color shifting optical coating is a
17 multilayer optical interference film including a dielectric layer interposed between two
18 absorber layers.
19

20 57. The method of claim 54, wherein the color shifting optical coating is a
21 multilayer optical interference film including an absorber layer, a dielectric layer, and a
22 reflector layer.
23

24 58. The method of claim 54, wherein the color shifting optical coating is a
25 multilayer optical interference film comprising alternating layers of low and high index of
26 refraction dielectric layers.

1 59. The method of claim 54, wherein the color shifting optical coating is formed
2 by physical vapor deposition.

3
4 60. The method of claim 54, wherein the carrier substrate layer comprises a
5 plastic sheet.

6
7 61. The method of claim 54, further comprising the step of attaching the security
8 article to an object with an adhesive.

9
10 62. The method of claim 61, wherein the adhesive is a pressure sensitive
11 adhesive.

12
13 63. The method of claim 61, wherein the object is selected from the group
14 consisting of security documents, monetary currency, credit cards, identification cards,
15 passports, and merchandise packaging.

16
17 64. A security article formed by the method recited in claim 54.

18
19 65. A security article comprising a holographic or diffractive pattern in a
20 multilayer thin film optical interference stack.

1 66. A hot stamp structure for use in attaching a security article to an object,
2 comprising:

3 a carrier sheet;

4 a release layer on the carrier sheet;

5 a light transmissive substrate on the release layer, the substrate having an
6 optical interference pattern thereon;

7 a color shifting optical coating on the substrate, the optical coating providing
8 an observable color shift as the angle of incident light or viewing angle changes; and
9 an adhesive layer on the optical coating.

10
11 67. The hot stamp structure of claim 66, wherein the carrier sheet comprises a
12 plastic material.

13
14 68. The hot stamp structure of claim 66, wherein the release layer comprises a
15 material selected from the group consisting of polyvinyl chloride, polystyrene, chlorinated
16 rubber, acrylonitrile-butadiene-styrene copolymer, nitrocellulose, methyl methacrylate,
17 acrylic copolymers, fatty acids, waxes, gums, gels, and mixtures thereof.

18
19 69. The hot stamp structure of claim 66, wherein the color shifting optical coating
20 is a multilayer optical interference film including a dielectric layer interposed between two
21 absorber layers.

22
23 70. The hot stamp structure of claim 66, wherein the color shifting optical coating
24 is a multilayer optical interference film including an absorber layer, a dielectric layer adjacent
25 to the absorber layer, and a reflector layer adjacent to the dielectric layer.
26

1 71. The hot stamp structure of claim 66, wherein the color shifting optical coating
2 is a multilayer optical interference film comprising alternating layers of low and high index
3 of refraction dielectric layers.

4
5 72. The hot stamp structure of claim 66, wherein the color shifting optical coating
6 comprises a plurality of multilayer optical interference flakes dispersed in a polymeric
7 medium.

8
9 73. The hot stamp structure of claim 66, wherein the color shifting optical coating
10 includes a laser ablated image formed therein.

11
12 74. The hot stamp structure of claim 66, wherein the color shifting optical coating
13 includes a laser scribed number.

14
15 75. The hot stamp structure of claim 73, wherein the color shifting optical coating
16 further includes a laser scribed number.

17
18 76. The hot stamp structure of claim 66, wherein the adhesive layer is a thermally
19 activated adhesive comprising a material selected from the group consisting of acrylic-based
20 polymers, ethylene vinyl acetate, polyamides, and combinations thereof.

21
22 77. The hot stamp structure of claim 66, wherein the adhesive layer comprises a
23 UV activated adhesive.

1 78. A method of attaching a security article to an object, comprising the steps of:
2 providing a hot stamp structure, comprising:
3 a carrier sheet;
4 a release layer on the carrier sheet;
5 a light transmissive substrate on the release layer, the substrate having
6 an optical interference pattern thereon;
7 a color shifting optical coating on the substrate, the optical coating
8 providing an observable color shift as the angle of incident light or viewing
9 angle changes; and
10 a thermally activated adhesive layer on the optical coating;
11 pressing the hot stamp structure onto a surface of an object which is heated
12 to a temperature to provide a bond between the object and the adhesive layer; and
13 removing the carrier sheet from the substrate to reveal a security article
14 attached to the object.

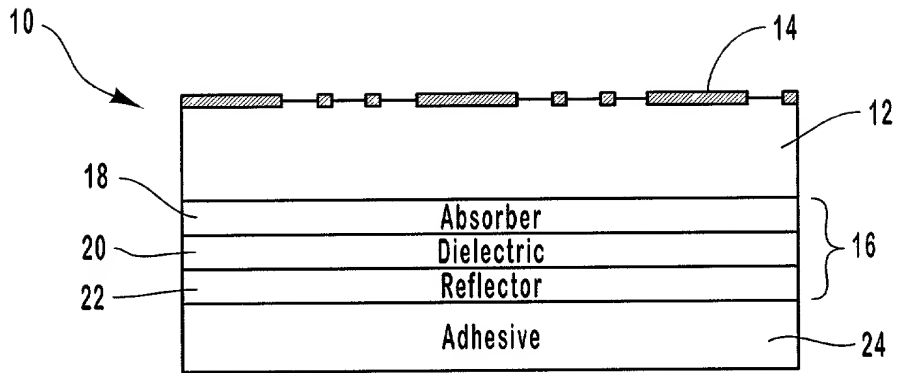


Fig. 1

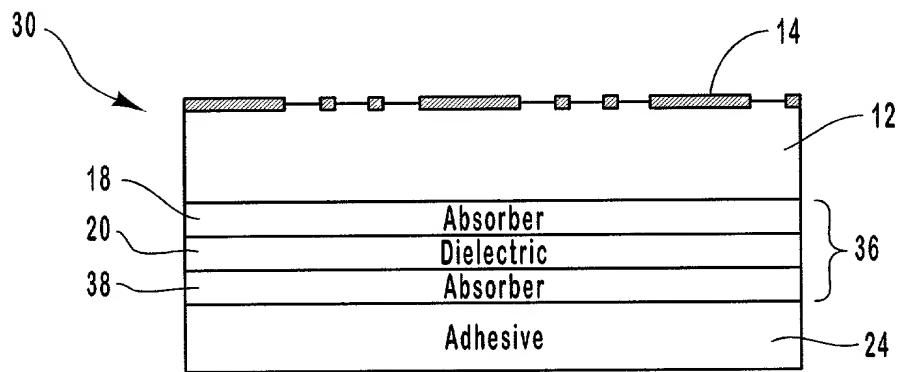


Fig. 2

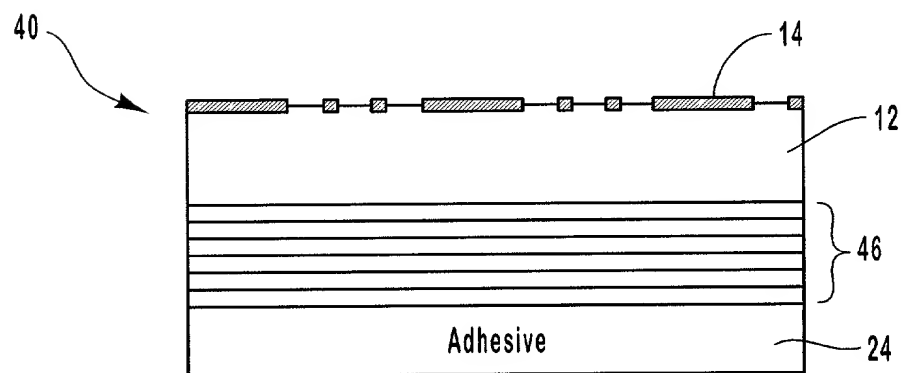


Fig. 3

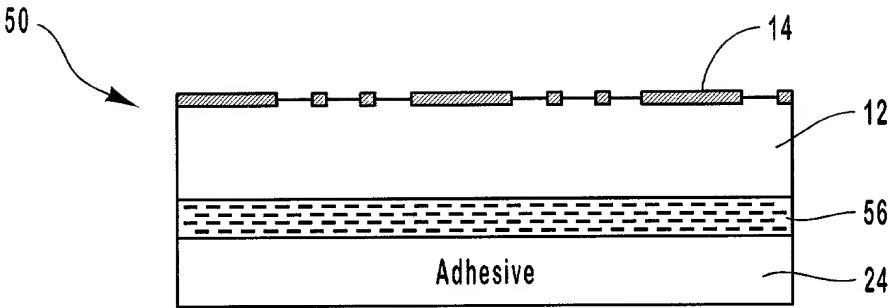


Fig. 4

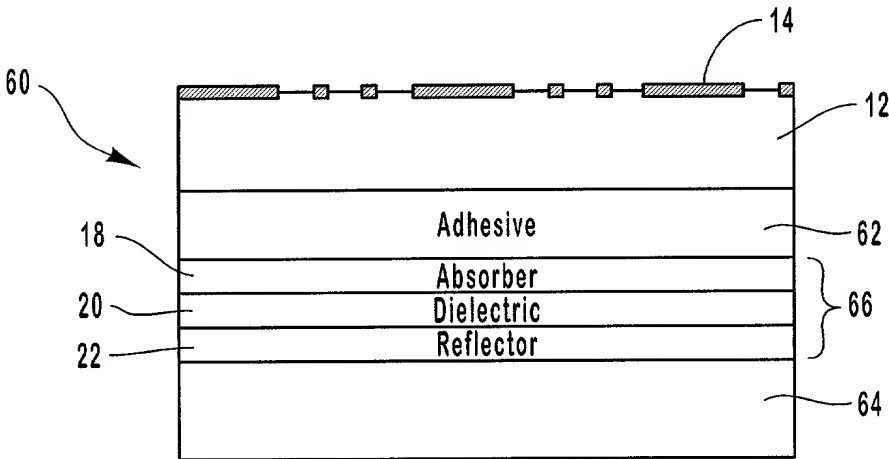


Fig. 5

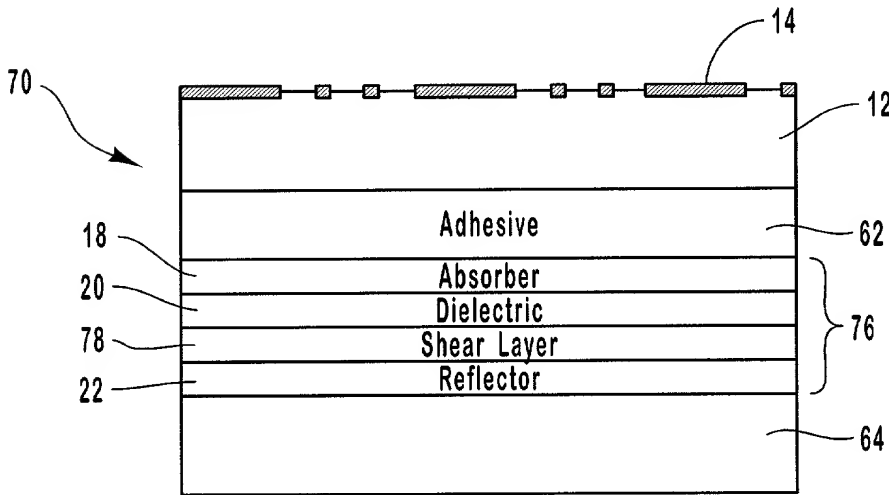


Fig. 6

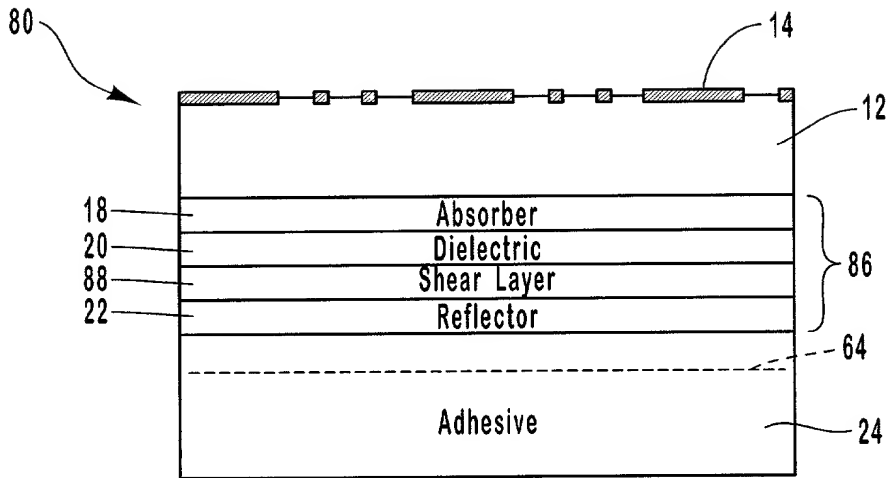


Fig. 7

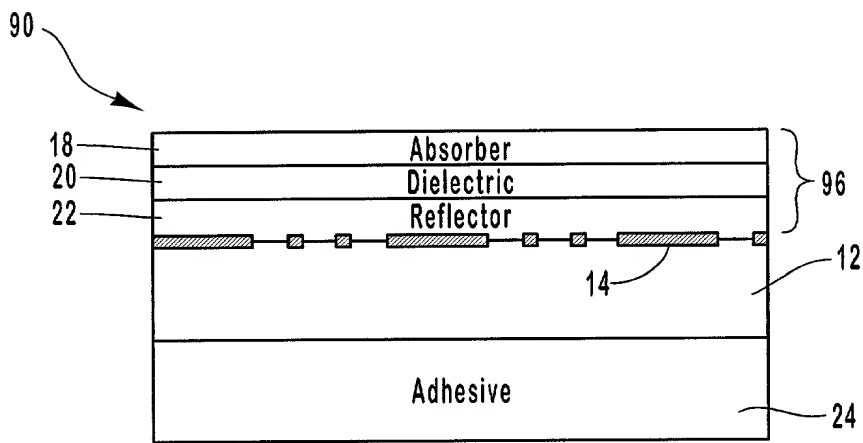


Fig. 8A

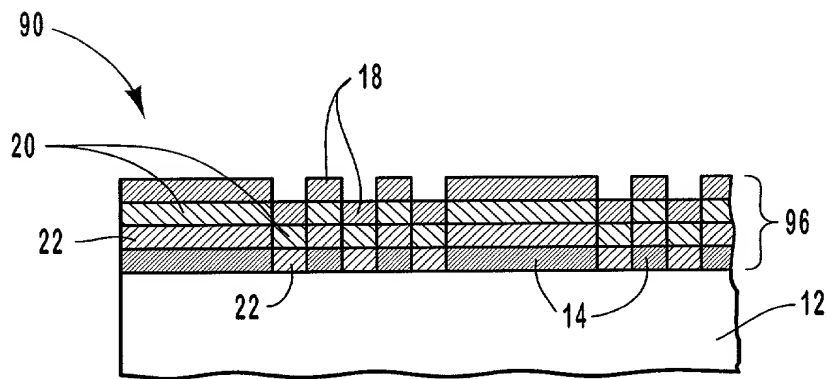


Fig. 8B

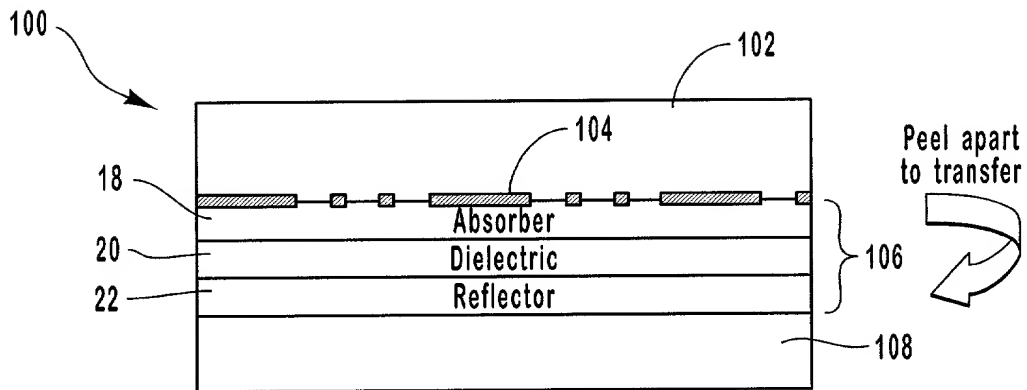


Fig. 9

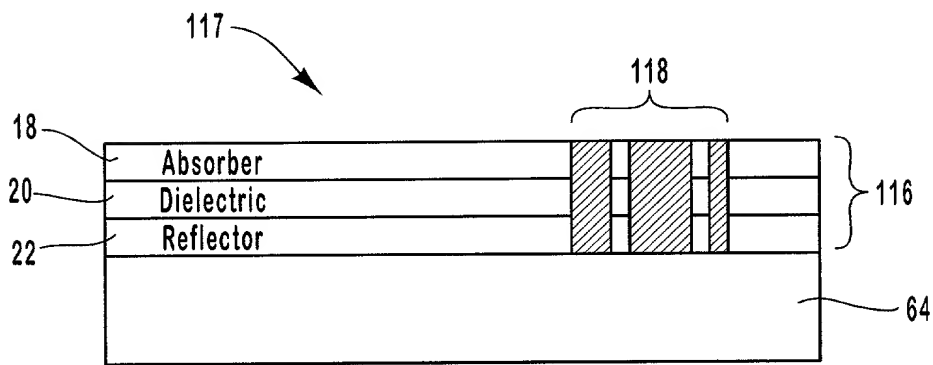


Fig. 10A

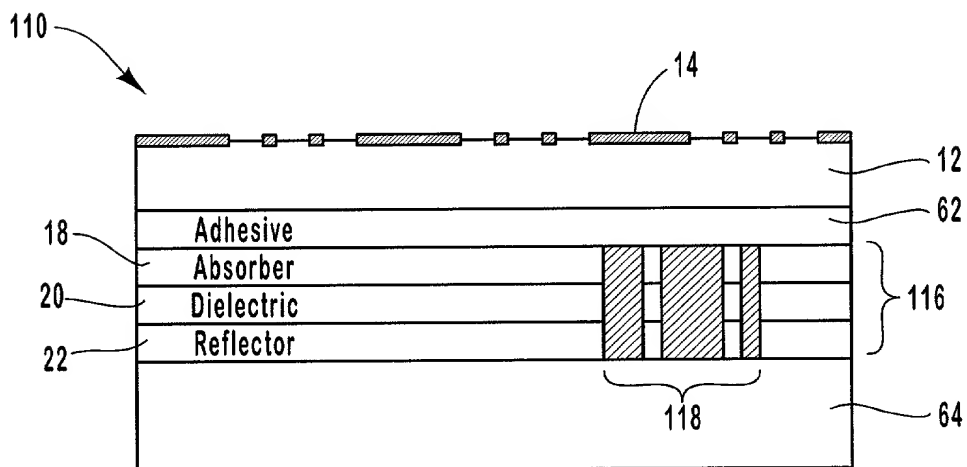


Fig. 10B

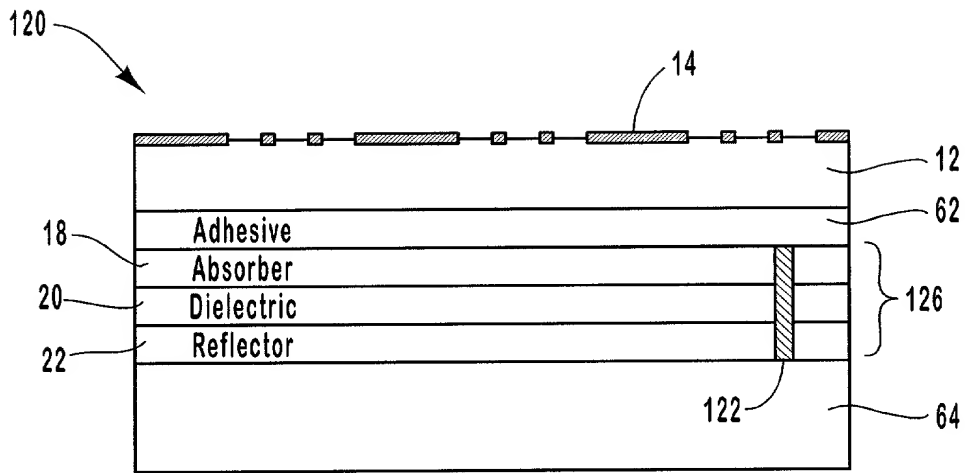


Fig. 11

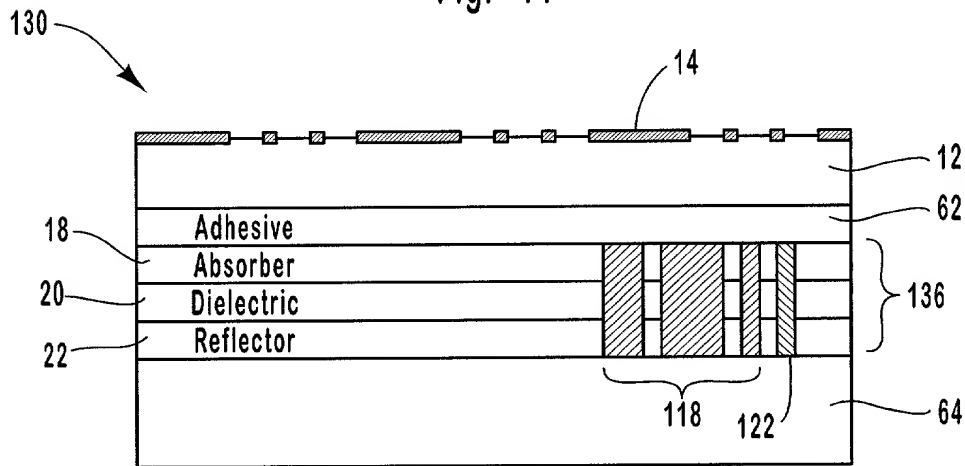


Fig. 12

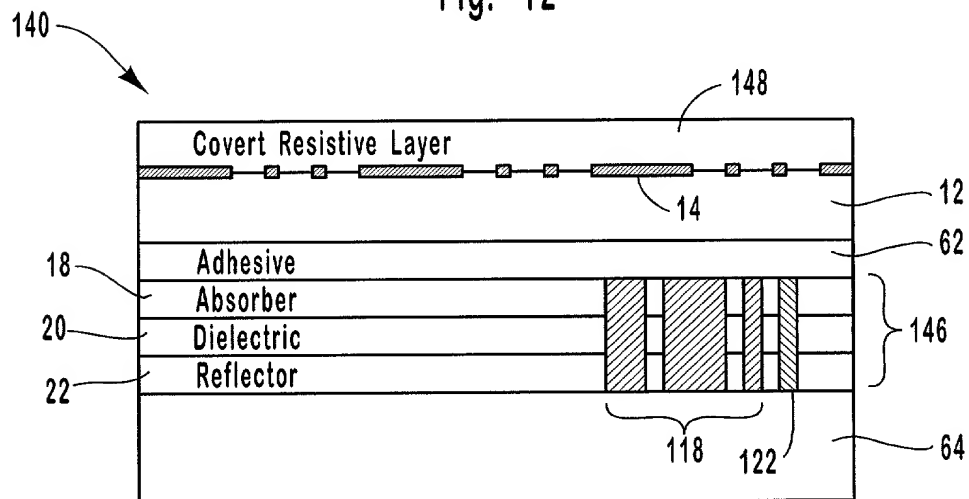


Fig. 13

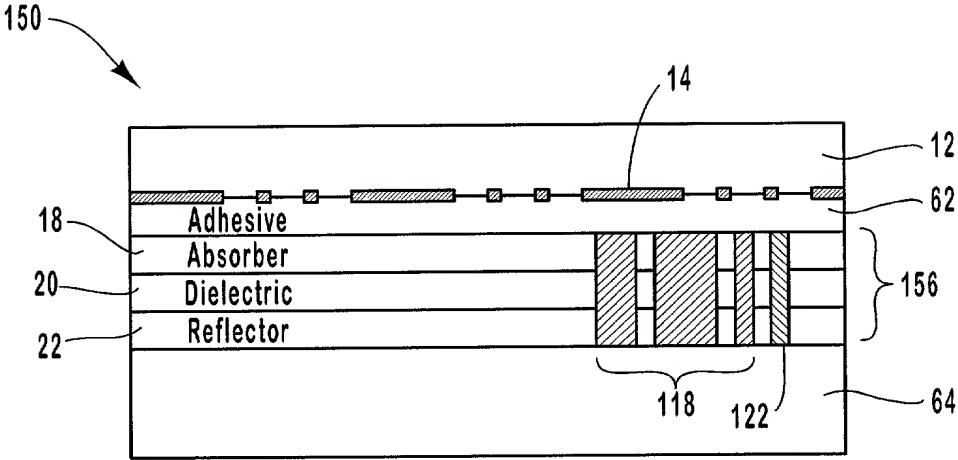


Fig. 14

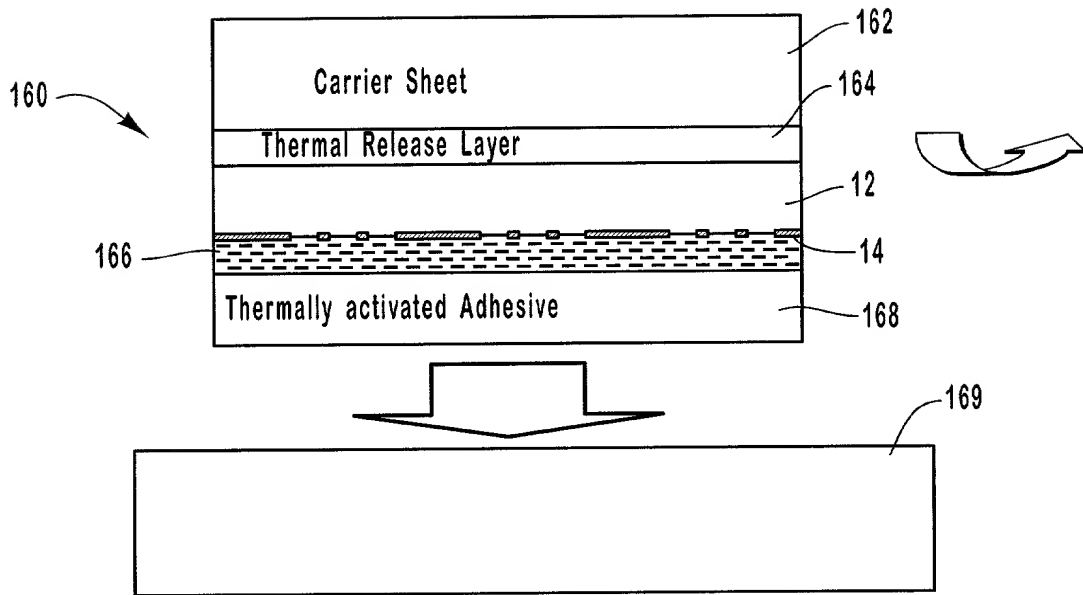


Fig. 15

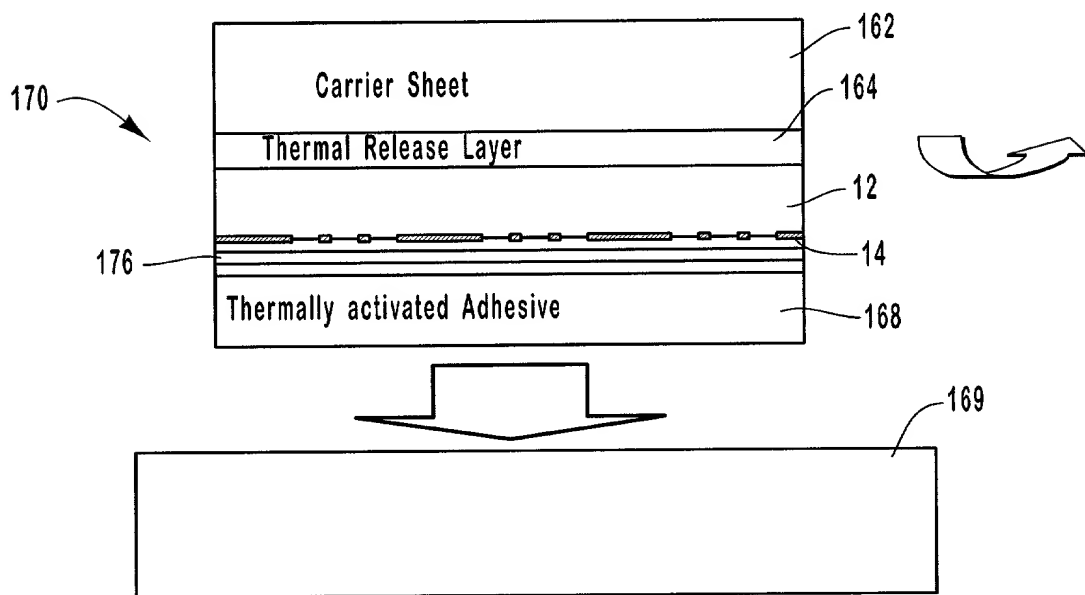


Fig. 16

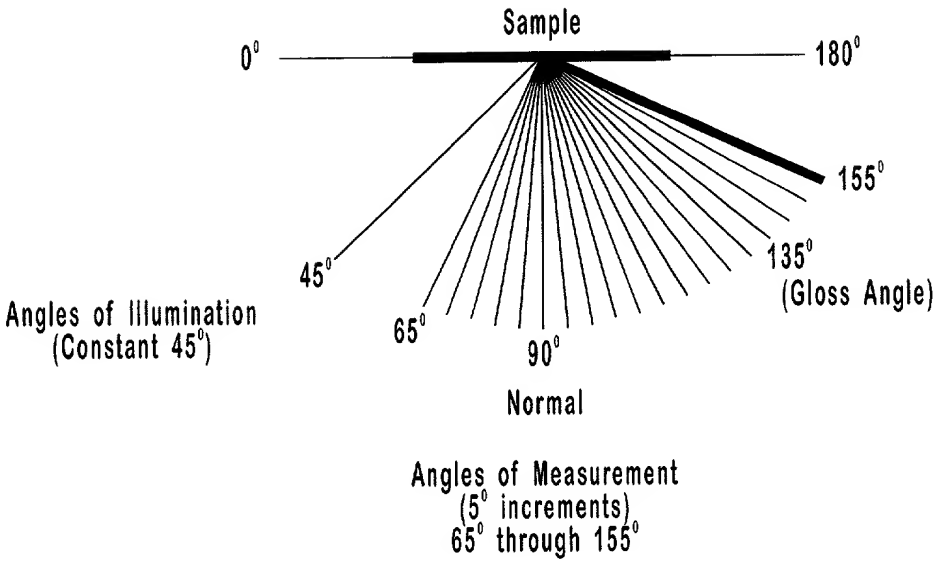


Fig. 17A

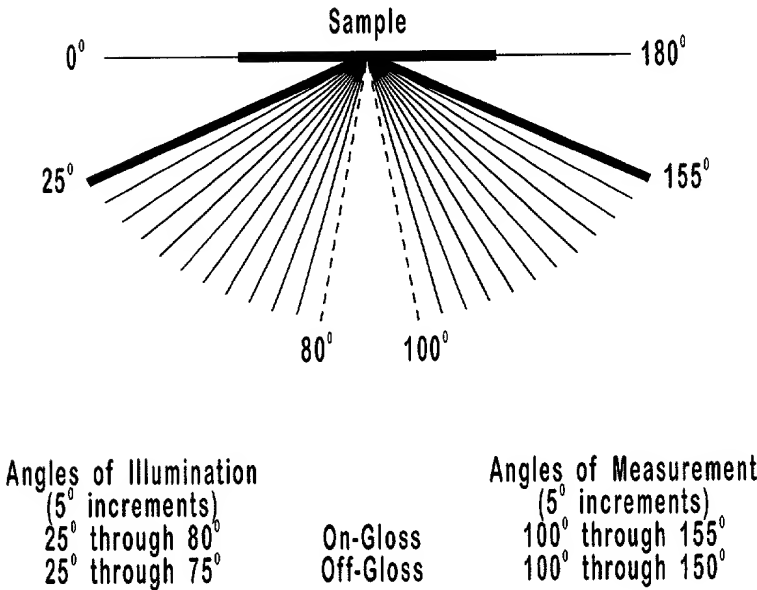


Fig. 17B

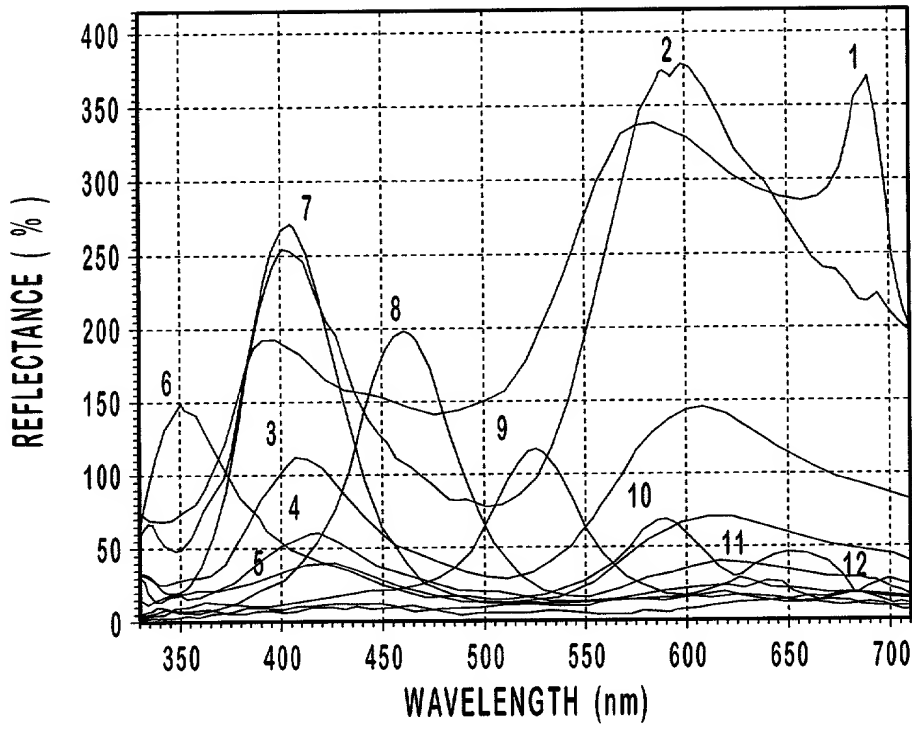


Fig. 18

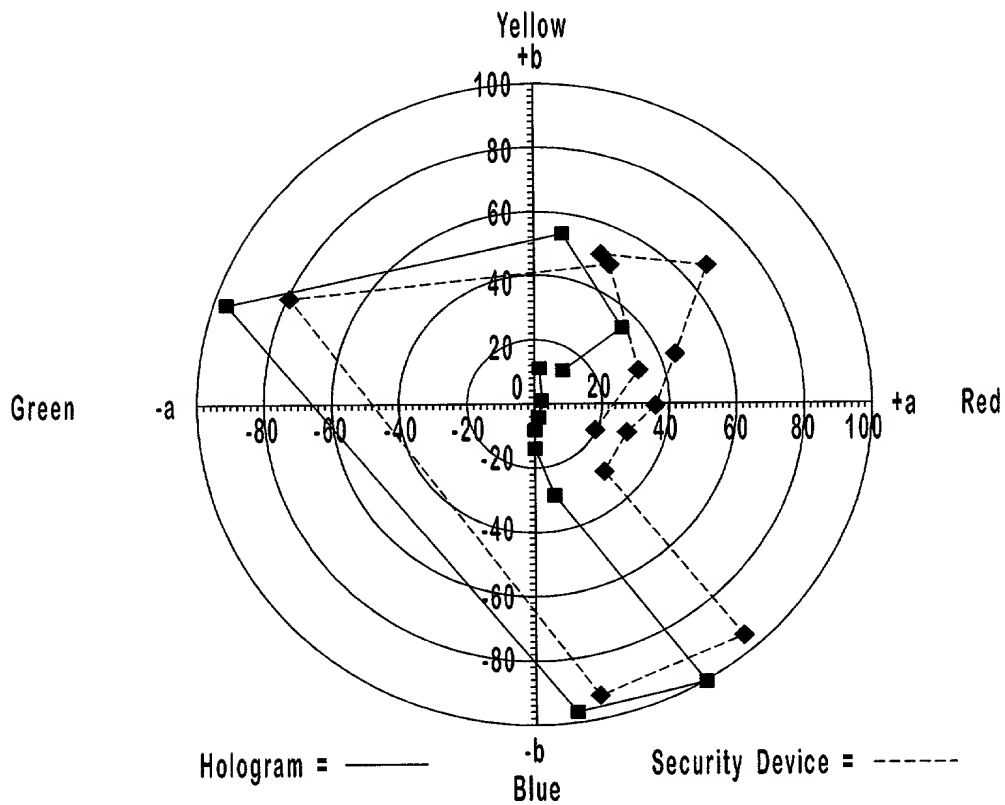


Fig. 19

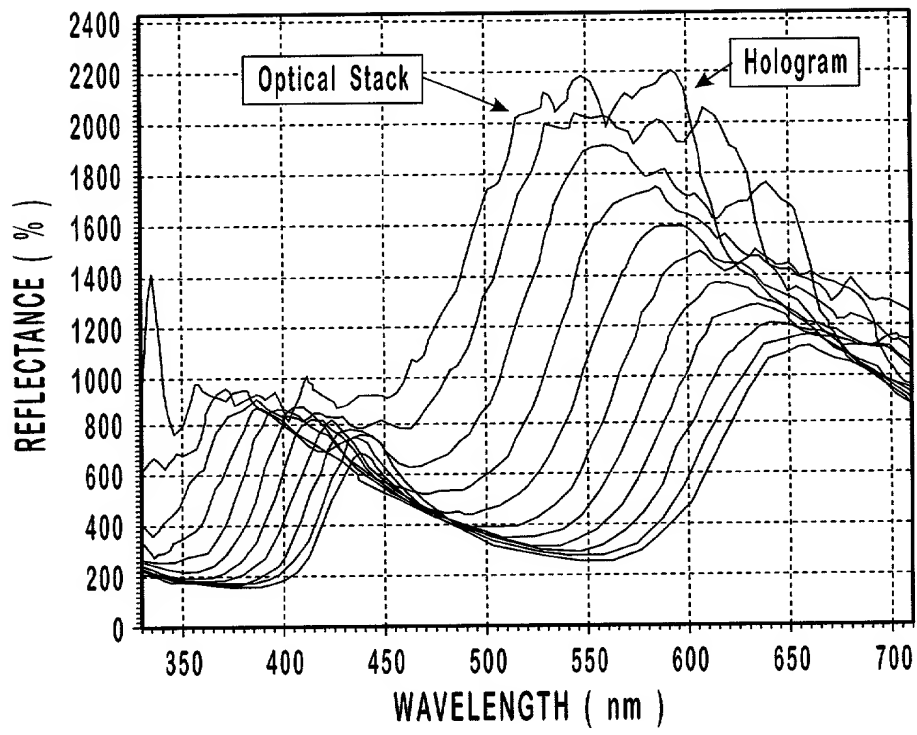


Fig. 20

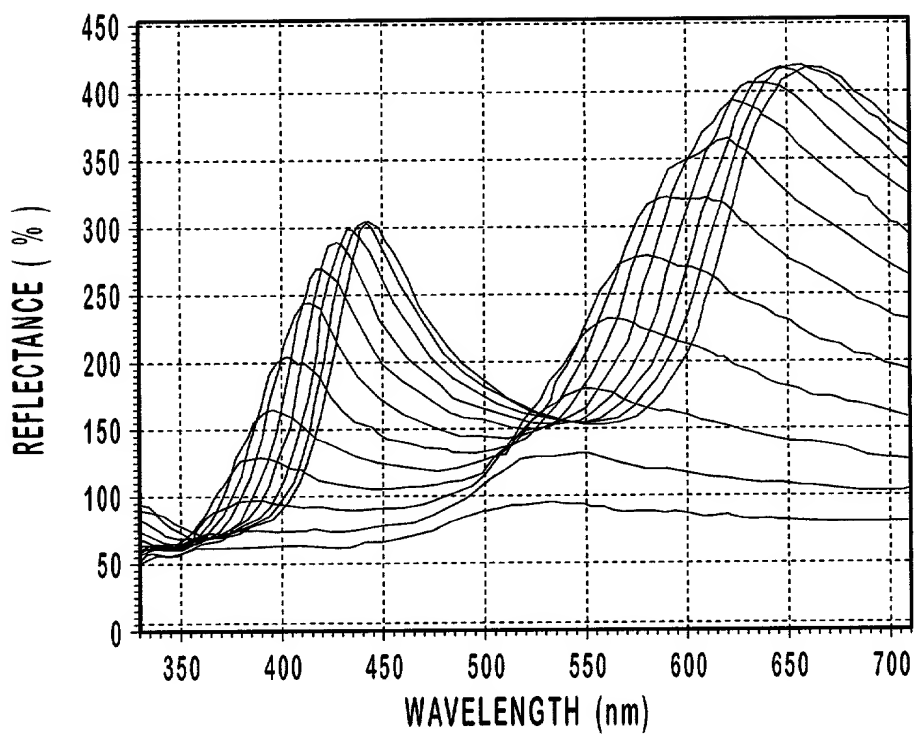


Fig. 21

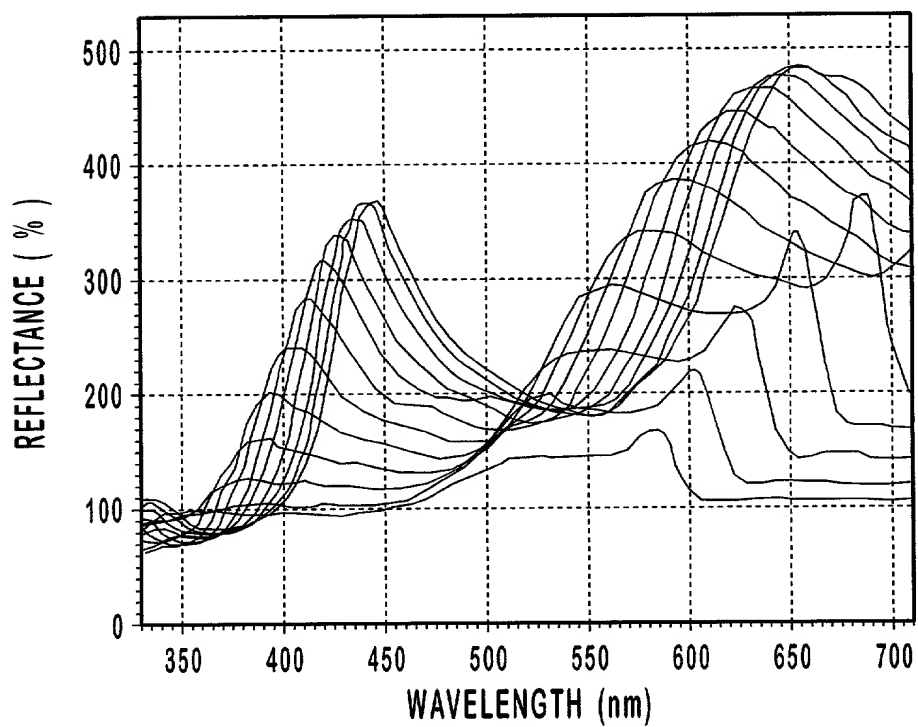


Fig. 22

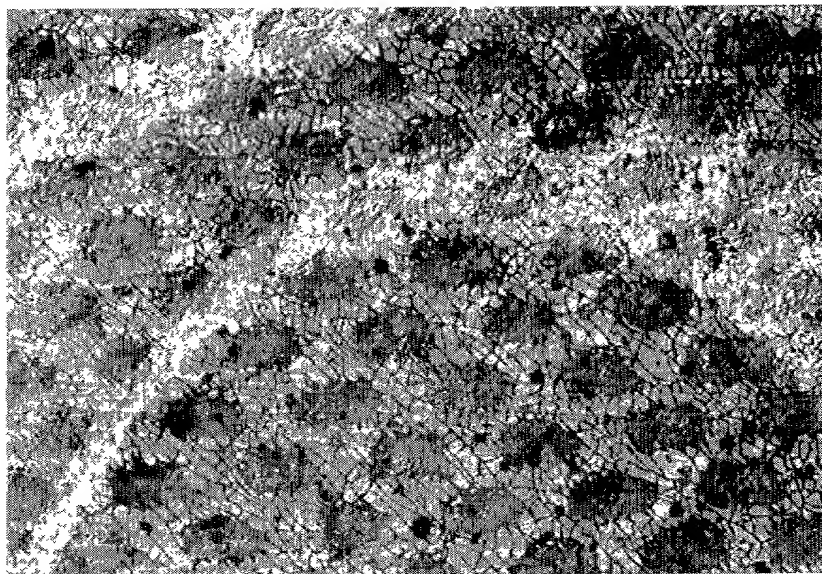


Fig. 23

